
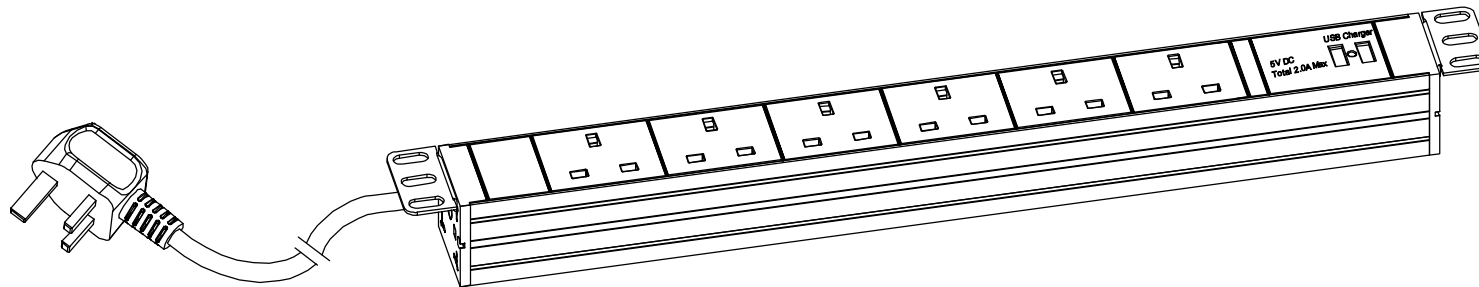


Copyright 2017 -

RoHS Compliant

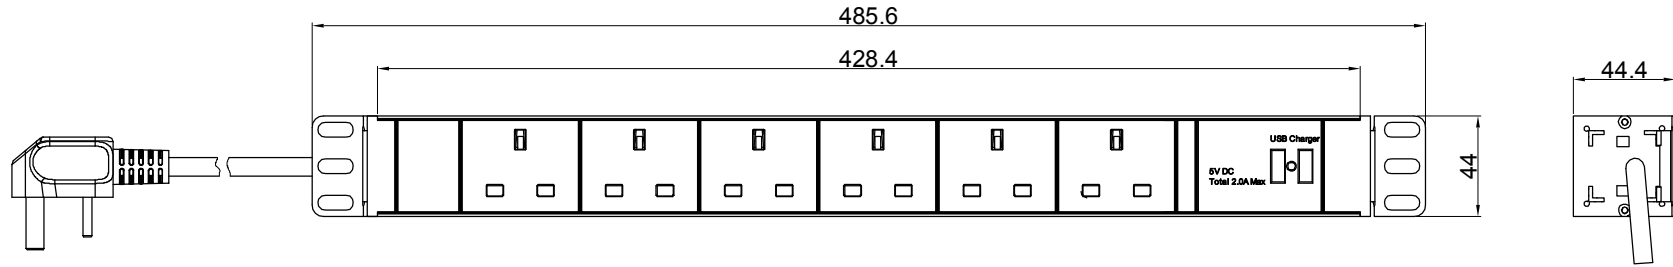

<p><b>Basic Series</b></p>	<p><b>OUTPUT</b>                  (6) BS1363 receptacles socket (13A Rated)                  (2) USB Charger <b>Total 2.0A Max,5V DC</b></p>	<p><b>OPERATING TEMPERATURE</b>                  0° to 60°C</p>
<p><b>INPUT</b>                  250VAC 13A 50HZ                  UK plug                  3M H05VV-F3G1.5mm Power lead</p>	<p><b>BRANCH CIRCUITS</b>                  (NONE)</p>	<p><b>MOUNTING ACCESORIES</b>                  (2) 42 Bracket</p>

Revisions		
Rev	Description	Date

DRAWING TYPE		BN4206USBH	
 (NO PERMISSION.NO CHANGING)		unit=mm Aluminium Silver Oxidation	
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE		Housing	
FILLET R0.5 ANGLE ±0.5° FIRST ANGLE			
SCALE 1:3		DATE 11-02-2017	