
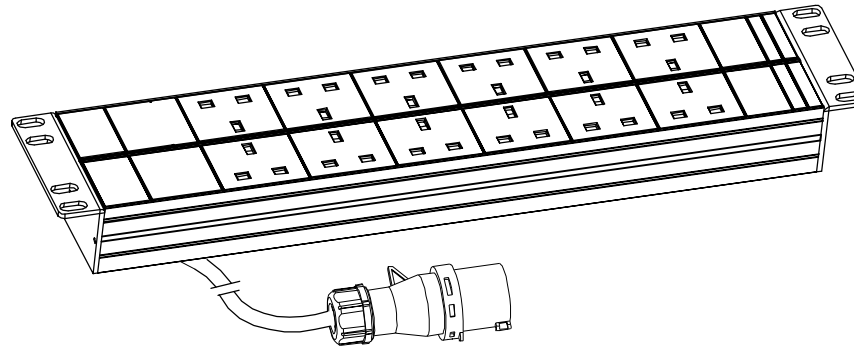





Copyright 2017 -

RoHS Compliant

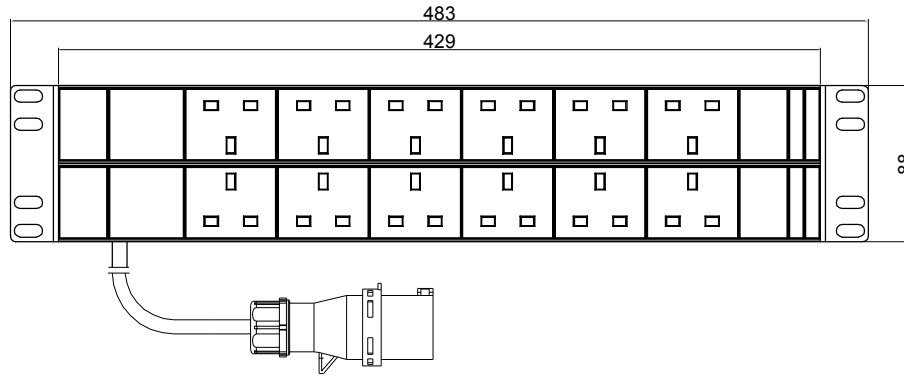

<p>Basic Series</p> <p>Current Meter Grey Chasis</p>	<p>OUTPUT</p> <p>(12) UK Socket (13A Rated)</p>	<p>OPERATING TEMPERATURE</p> <p>0° to 60°C</p>
<p>INPUT</p> <p>250VAC 16A 50HZ 16A Commando plug 5M H05VV-F3G1.5mm² Power lead</p>	<p>BRANCH CIRCUITS</p> <p>(NONE)</p>	<p>MOUNTING ACCESORIES</p> <p>(2) Metal Bracket</p>

Revisions		
Rev	Description	Date

DRAWING TYPE  <small>(NO PERMISSION, NO CHANGING)</small>		BN421216AH5M	
unit=mm		Housing	Aluminium
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			Grey Oxidation
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE			
SCALE 1:3		DATE 02-06-2017	