


Copyright 2017-

RoHS Compliant

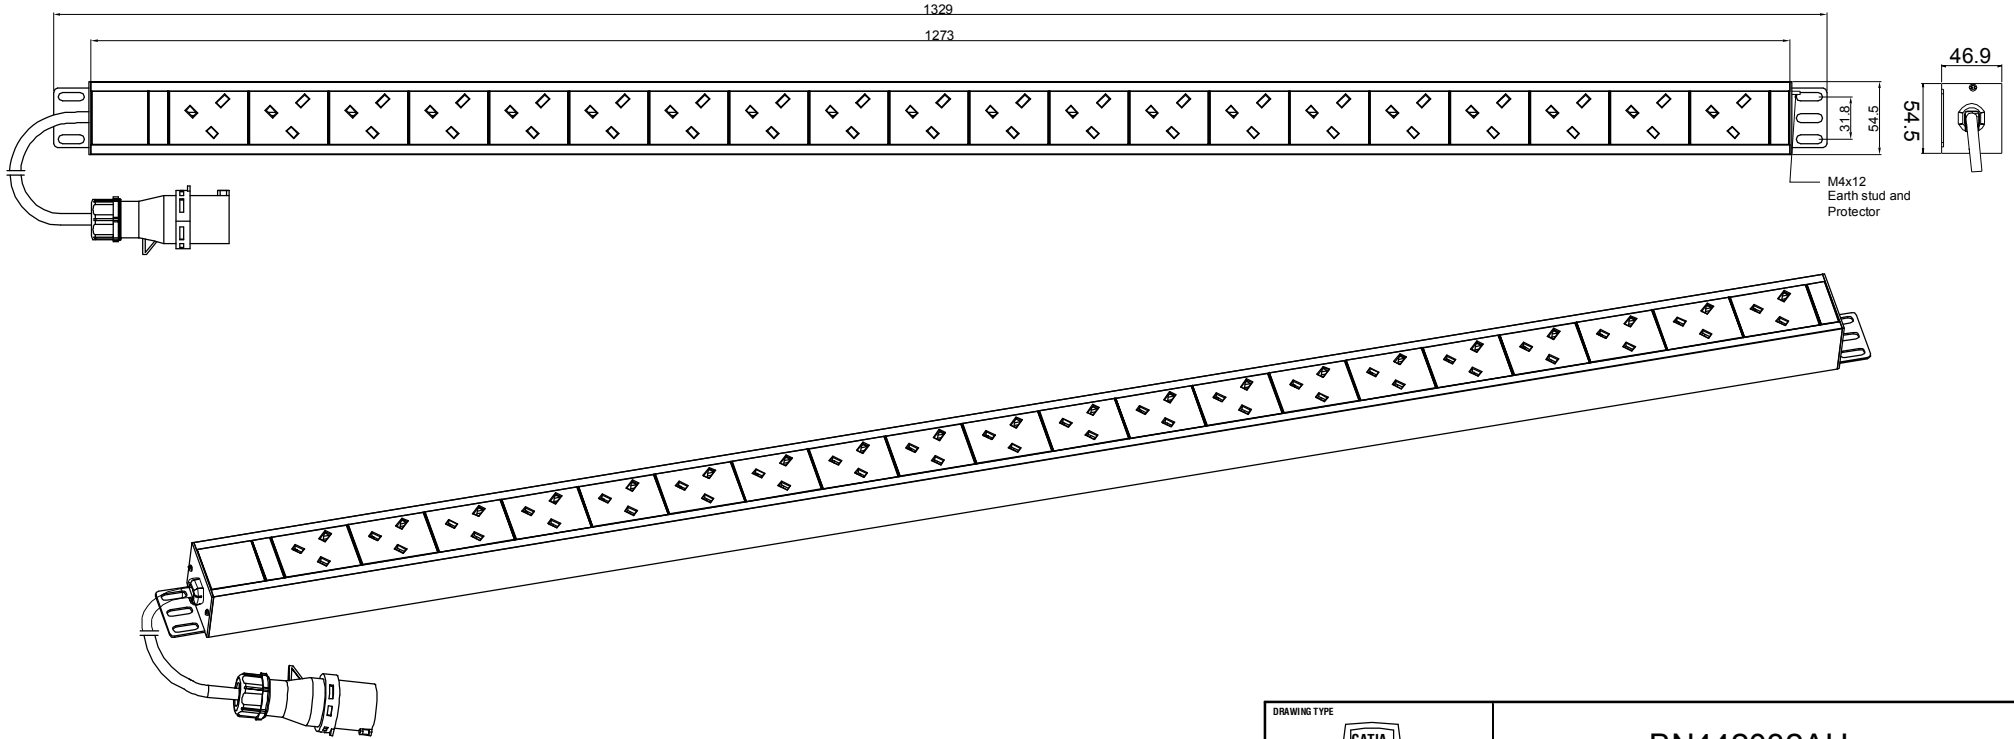

Basic Series	OUTPUT (20) BS1363 receptacles (13A Rated)	OPERATING TEMPERATURE 0° to 60°C
INPUT 250VA 32A 50HZ 32A plug 3M H07RN-F3G4.0mm ² Power lead	BRANCH CIRCUITS (NONE)	MOUNTING ACCESORIES (2) Metal Bracket

Revisions		
Rev	Description	Date

DRAWING TYPE (NO PERMISSION, NO CHANGING)		BN442032AH	
unit=mm		Housing	Aluminium
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			Black Powder coating
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE 			
SCALE 1:3		DATE 26-05-2017	