
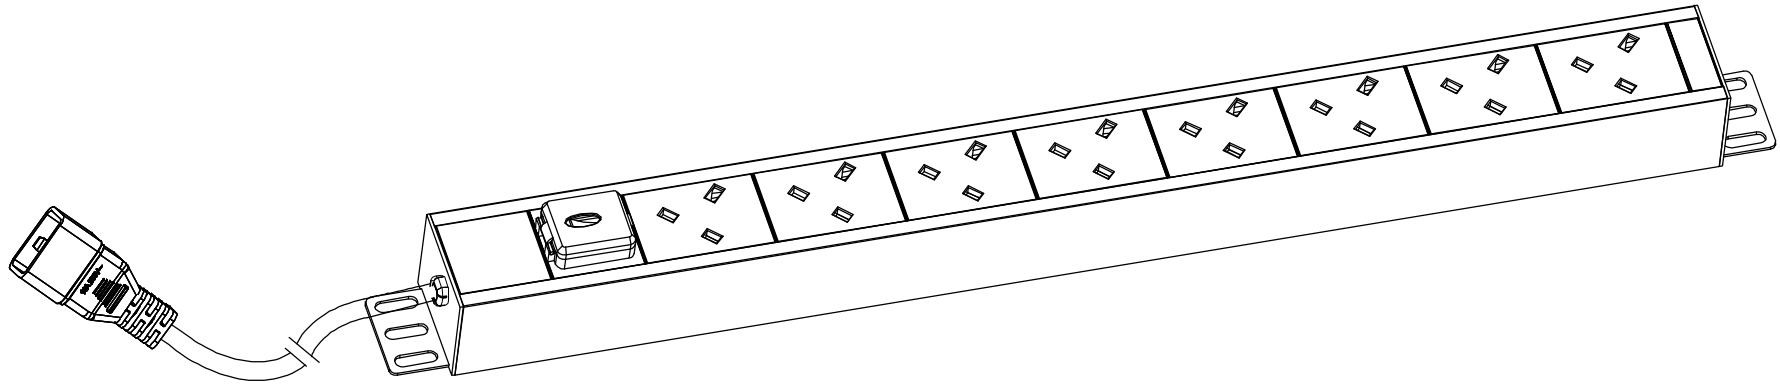


Copyright 2017 -

RoHS Compliant

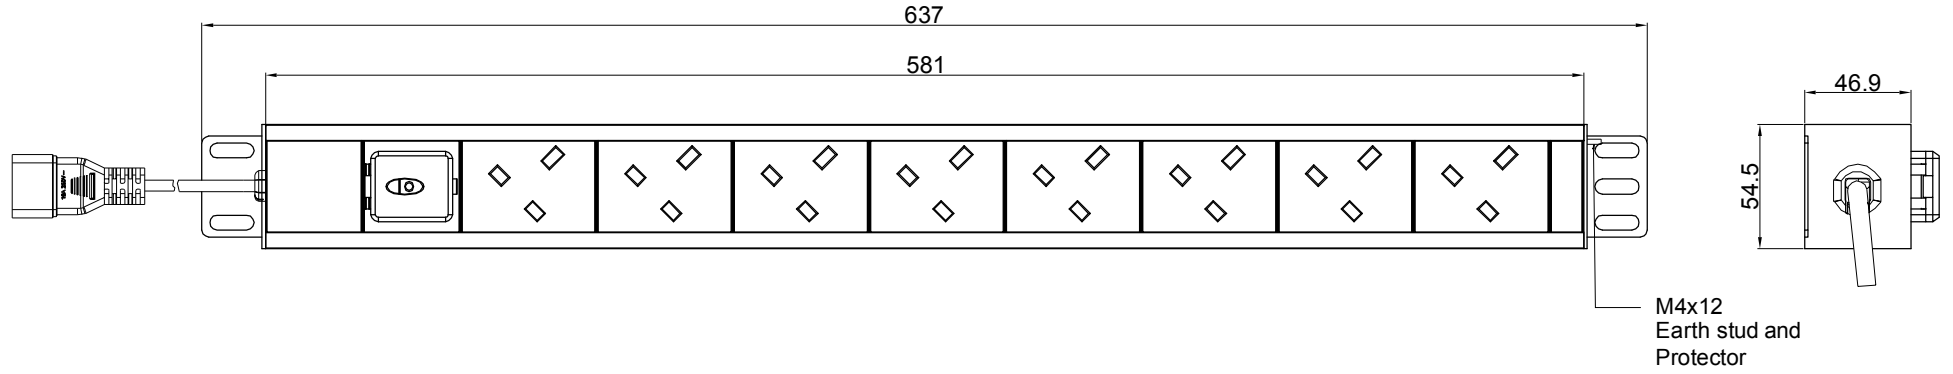

<p>Basic Series</p>	<p>OUTPUT</p> <p>(8) BS1363 sockets (13A Rated) (1) Green switch</p>	<p>OPERATING TEMPERATURE</p> <p>0° to 60°C</p>
<p>INPUT</p> <p>250VAC 16A 50HZ C20 plug 3M H05VV-F3G1.5mm² Power lead</p>	<p>BRANCH CIRCUITS</p> <p>(NONE)</p>	<p>MOUNTING ACCESORIES</p> <p>(2) Metal Bracket</p>

Revisions		
Rev	Description	Date

DRAWING TYPE		BNS4408C20V	
 <small>(NO PERMISSION.NO CHANGING)</small>		Aluminium	
unit=mm		Black Powder coating	
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE		Housing	
FILLET R0.5 ANGLE ±0.5° FIRST ANGLE 			
SCALE 1:3		DATE 24-10-2017	