
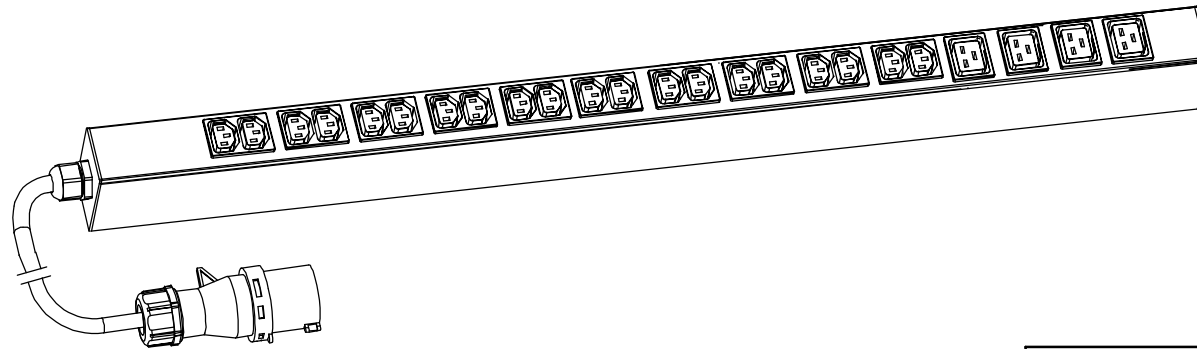
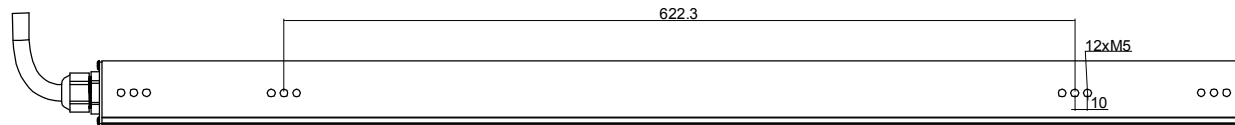
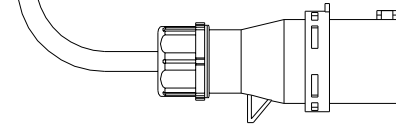



Copyright 2017 -

RoHS Compliant

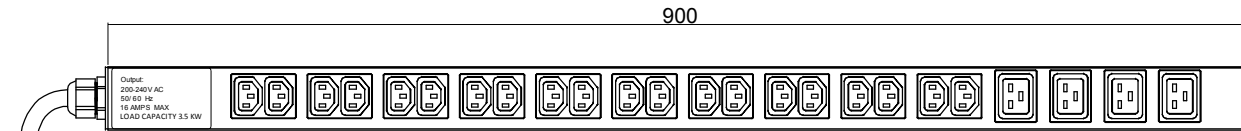

<b>Basic Series</b>	<b>OUTPUT</b> (20) IEC 60320 C13 (10A Rated) (4) IEC 60320 C19 (16A Rated)	<b>OPERATING TEMPERATURE</b> 0° to 60°C
<b>INPUT</b> 250VAC 32A 50HZ 16A Commando plug 3M H05VV-F3G1.5mm <sup>2</sup> Power lead	<b>BRANCH CIRCUITS</b> (NONE)	<b>MOUNTING ACCESORIES</b> (2) 46 Bracket

Revisions		
Rev	Description	Date

DRAWING TYPE  <small>(NO PERMISSION, NO CHANGING)</small>		<b>ENIEC45200416AV</b>	
<b>unit=mm</b>		<b>Housing</b>	Aluminium
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			Black Powder coating
<b>FILLET</b>	R0.5	DATE 21-06-2017	
<b>ANGLE</b>	±0.5°		
<b>FIRST ANGLE</b> 			
<b>SCALE 1:3</b>			