



1 2 3 4 5 6 7 8


A

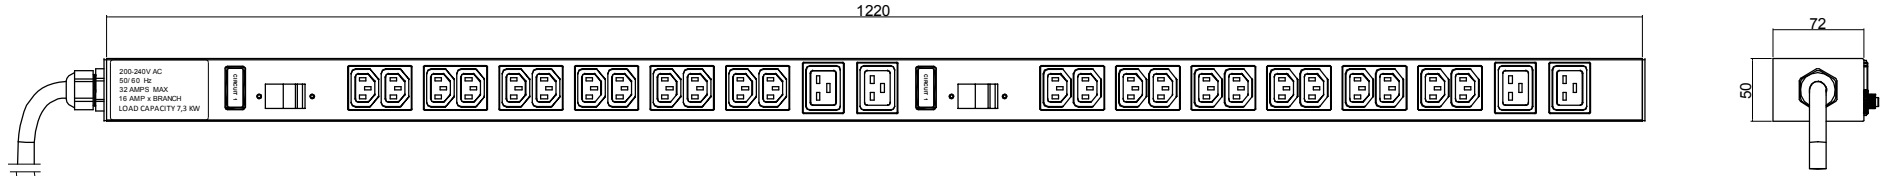


B

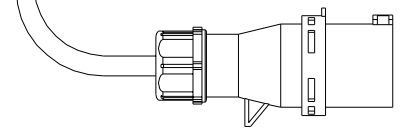

C

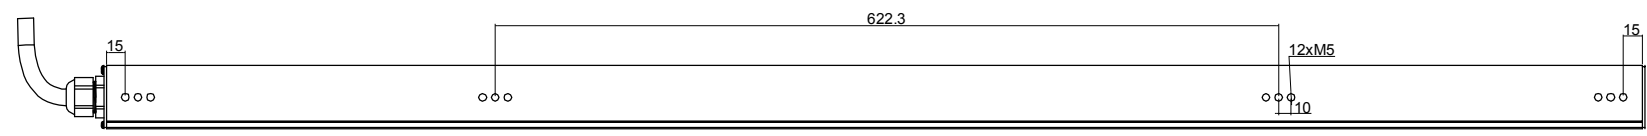

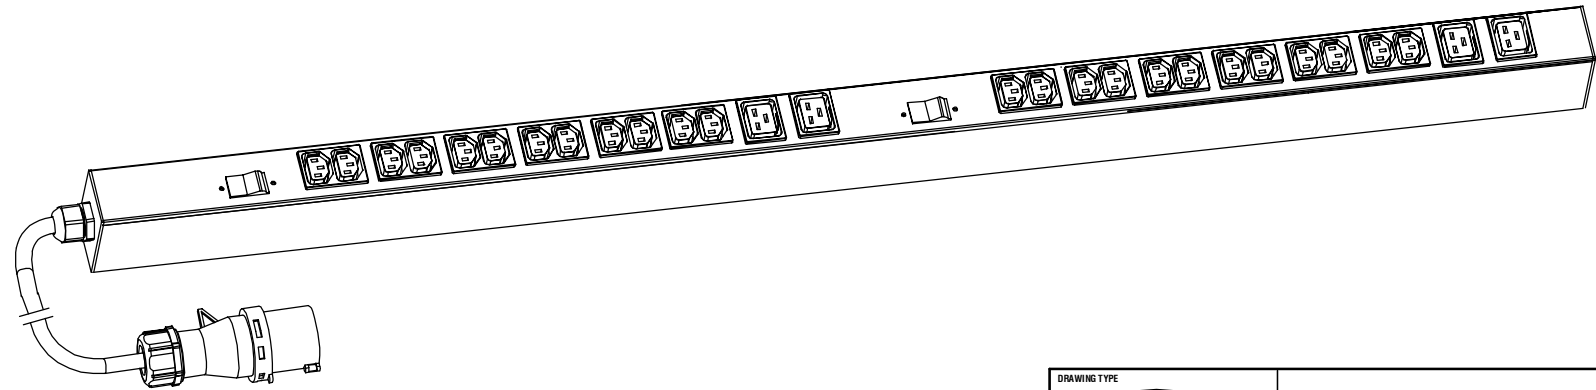


D



E

TECHNOLOGY FUNCTIONALITY	OUTPUT (24) IEC 60320 C13 (10A Rated) (4) IEC 60320 C19 (16A Rated)	OPERATING TEMPERATURE 30° to 140°F 0° to 60°C
INPUT 250VAC 32A 50HZ IEC60309 32A Commando plug 3M H07RN-F3G4mm² Power lead	BRANCH CIRCUITS (2) Single Pole Magnetic Hidraulic CB	MOUNTING ACCESORIES (2) IPFIX001 (2) IPFIX002 (2) IPFIX003

DRAWING TYPE		ENIECCB45240432AV	
 <small>(NO PERMISSION, NO CHANGING)</small>		MATERIAL:	
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE			
SCALE 1:3		DATE 2014-12-16	

1 2 3 4 5 6 7 8