





Copyright 2015 - Powertek

RoHS Compliant

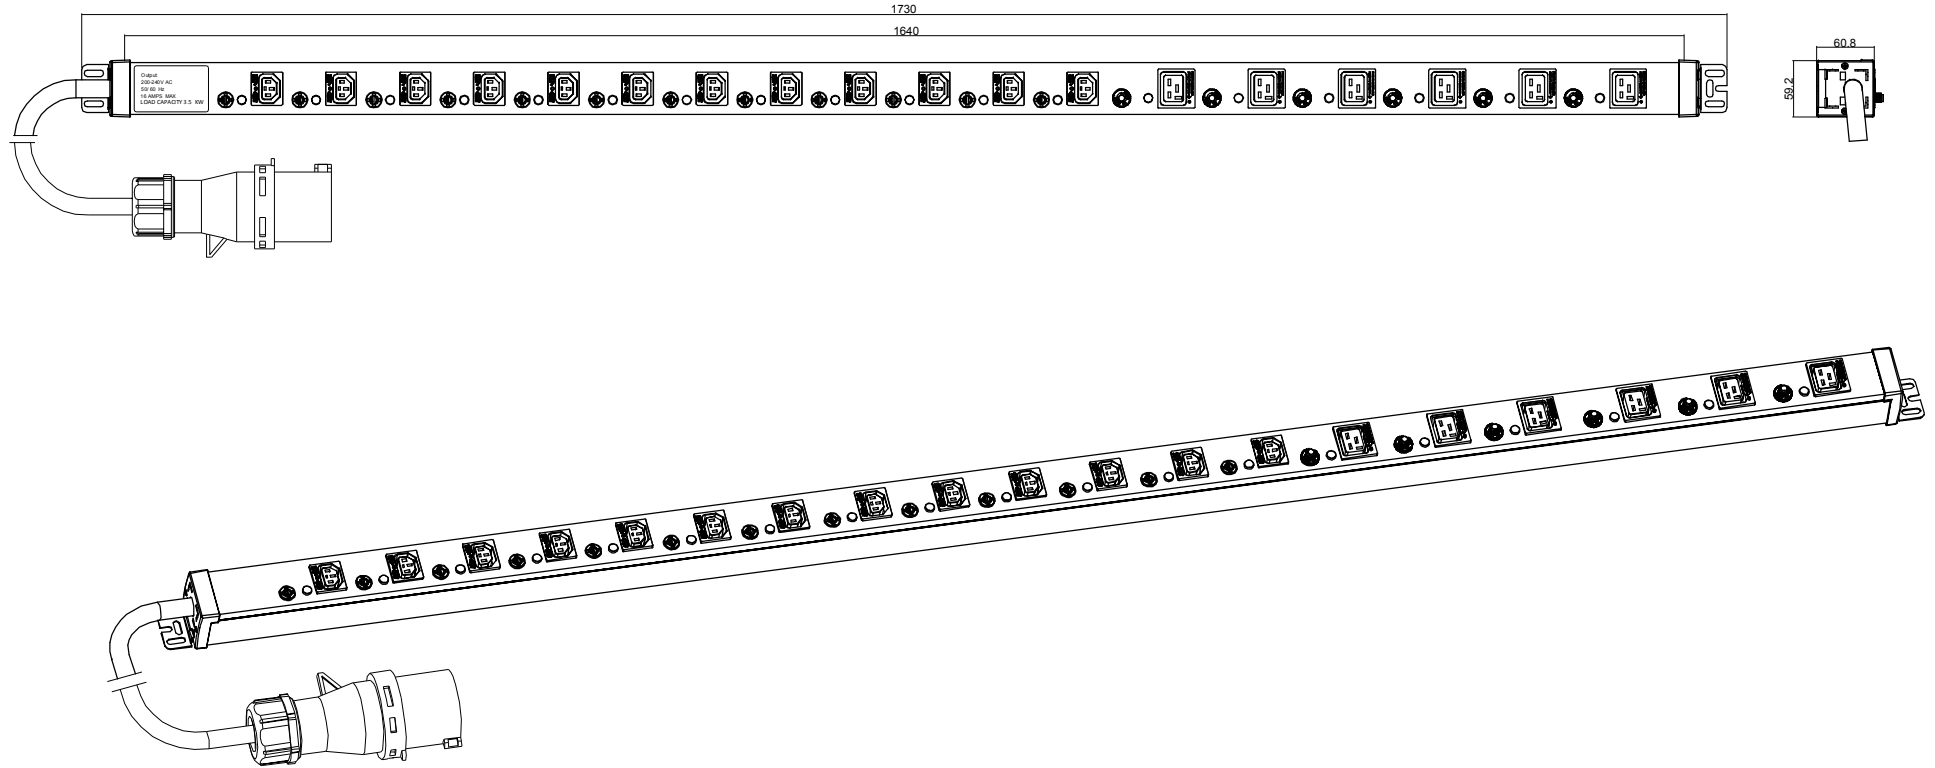

<p><b>Basic Series</b></p>	<p><b>OUTPUT</b></p> <p>(12) IECC13 Locking (10A Rated) (6) C19 Locking (16A Rated)</p>	<p><b>OPERATING TEMPERATURE</b></p> <p>0° to 60°C</p>
<p><b>INPUT</b></p> <p>250VAC 16A 50HZ IEC60309 16A Commando plug 5M H05VV-F3G1.5mm<sup>2</sup> Power lead</p>	<p><b>BRANCH CIRCUITS</b></p> <p>(12) 10A Fuse (6) 16A Overload</p>	<p><b>MOUNTING ACCESORIES</b></p> <p>(2) 46 Bracket</p>

Revisions		
Rev	Description	Date

DRAWING TYPE		ENIECLKiFL4612065M16AV	
 <small>(NO PERMISSION, NO CHANGING)</small>		Housing	Aluminium
<b>unit=mm</b>			Black Powder coating
<b>TECHNICAL STANDARD</b> 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE			
SCALE 1:3		DATE 16-04-2015	