Copyright 2015 - Powertek

RoHS Compliant

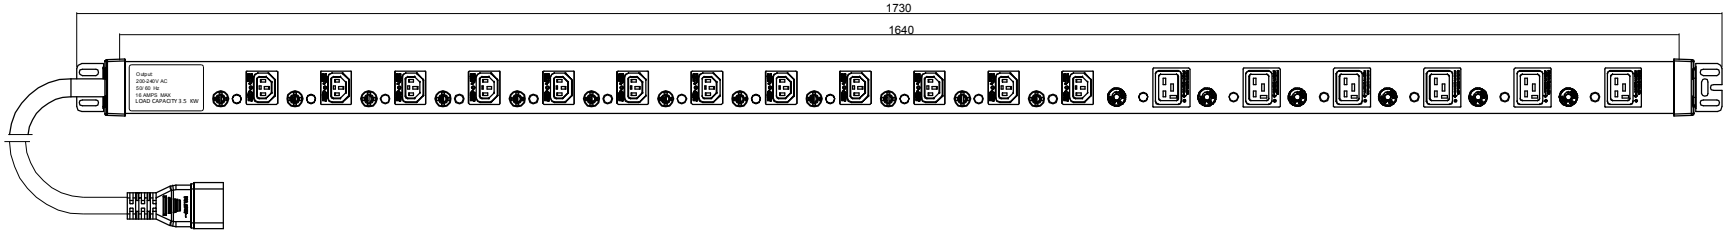

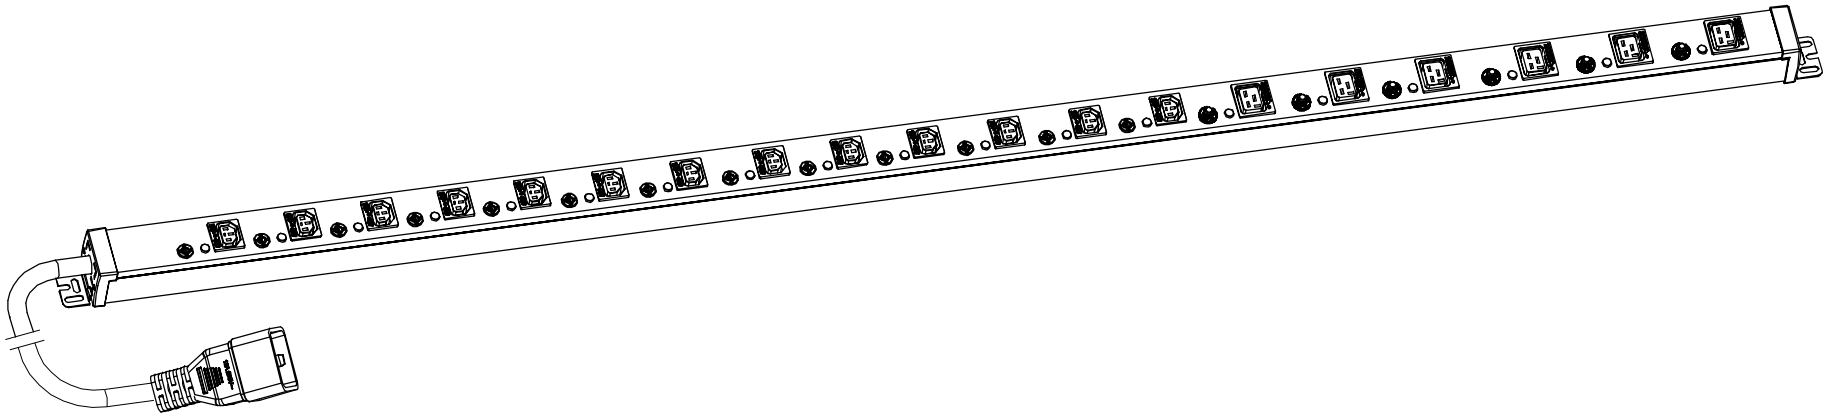

Basic Series	OUTPUT	OPERATING TEMPERATURE
	(12) IECC13 Locking (10A Rated) (6) C19 Locking (16A Rated)	0° to 60°C
INPUT	**BRANCH CIRCUITS**	**MOUNTING ACCESORIES**
250VAC 16A 50HZ C20 plug 3M H05VV-F3G1.5mm ²Power lead	(12) 10A Fuse (6) 16A Overload	(2) 46 Bracket

Revisions		
Rev	Description	Date

DRAWING TYPE
CATIA
(NO PERMISSION.NO CHANGING)

unit=mm

TECHNICAL STANDARD
1.IT11;
2.NO RUSTNESS
3.NO FLAW ON THE SURFACE

FILLET	R0.5
ANGLE	±0.5°

FIRST ANGLE

SCALE 1:3

ENIECLKiFL461206C20V

Housing	Aluminium
	Black Powder coating

Powertek

DATE 16-04-2015