
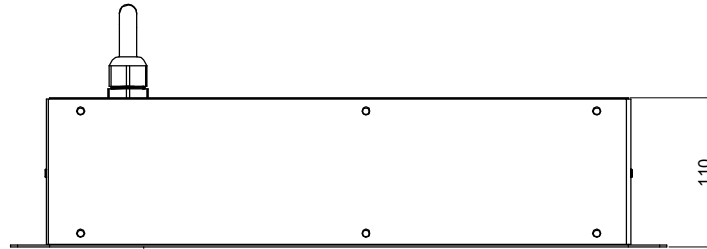



Copyright 2017 -

RoHS Compliant

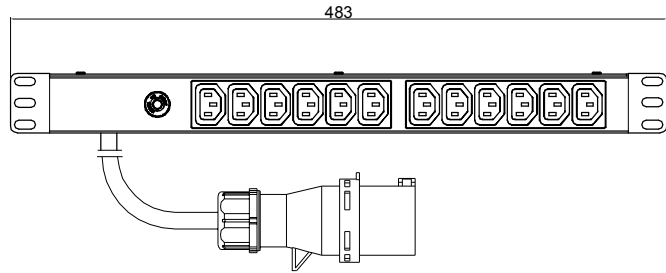

<p>Basic Series</p>	<p>OUTPUT</p> <p>(24) IECC13 (10A Rated)</p>	<p>OPERATING TEMPERATURE</p> <p>0° to 60°C</p>
<p>INPUT</p> <p>250VAC 32A 50HZ IEC60309 32A 3P plug 3M H07RN-F3G4.0mm² Power lead</p>	<p>BRANCH CIRCUITS</p> <p>(2) 1 Pole 16A Hydraulic-Magnetic Circuit Breaker</p>	<p>MOUNTING ACCESORIES</p> <p>(2) Metal Bracket</p>

Revisions		
Rev	Description	Date

DRAWING TYPE		ENO602432AH	
 <small>(NO PERMISSION, NO CHANGING)</small>		Housing 1.5mm Steel Black Powder coating	
unit=mm			
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE		SCALE 1:3 DATE 10-05-2017	
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE 			