
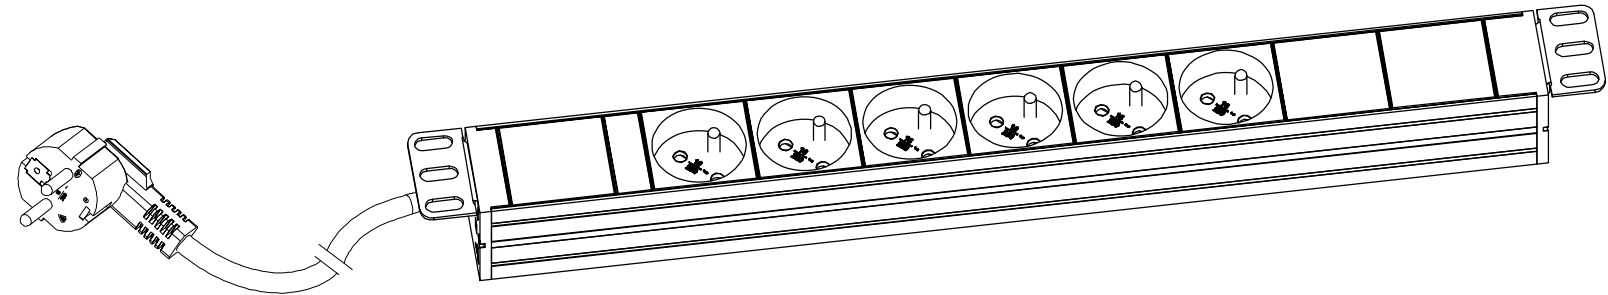


Copyright 2017 -

RoHS Compliant

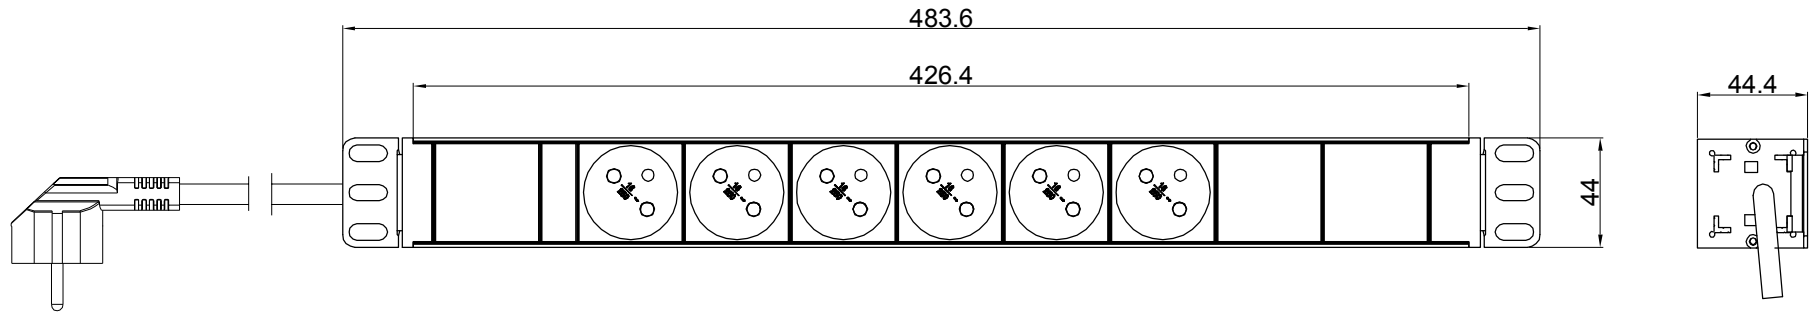

| | | |
|---|--------------------------------------|--|
| Basic Series | OUTPUT (6) UTE (16A Rated) | OPERATING TEMPERATURE 0° to 60°C |
| INPUT 250VAC 16A 50HZ Schuko plug 3M H05VV-F3G1.5mm² Power lead | BRANCH CIRCUITS (NONE) | MOUNTING ACCESORIES (2) 42 Bracket |

| Revisions | | |
|-----------|-------------|------|
| Rev | Description | Date |
| | | |

| | | | |
|--|-------|-----------------|------------------|
| DRAWING TYPE (NO PERMISSION, NO CHANGING) | | FN4206H | |
| unit=mm | | Housing | Aluminium |
| TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE | | | Silver Oxidation |
| FILLET | R0.5 | DATE 31-05-2017 | |
| ANGLE | ±0.5° | | |
| FIRST ANGLE | | | |
| Power Meter SCALE 1:3 | | | |