
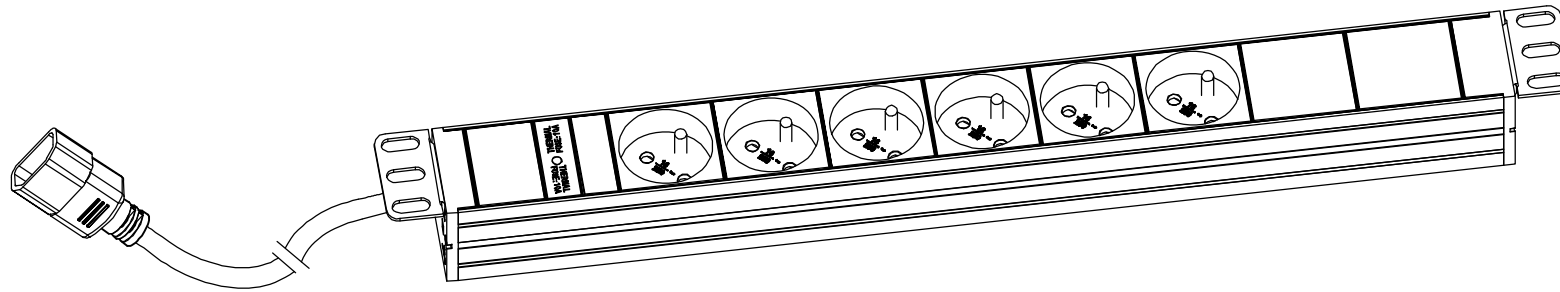


Copyright 2017 -

RoHS Compliant

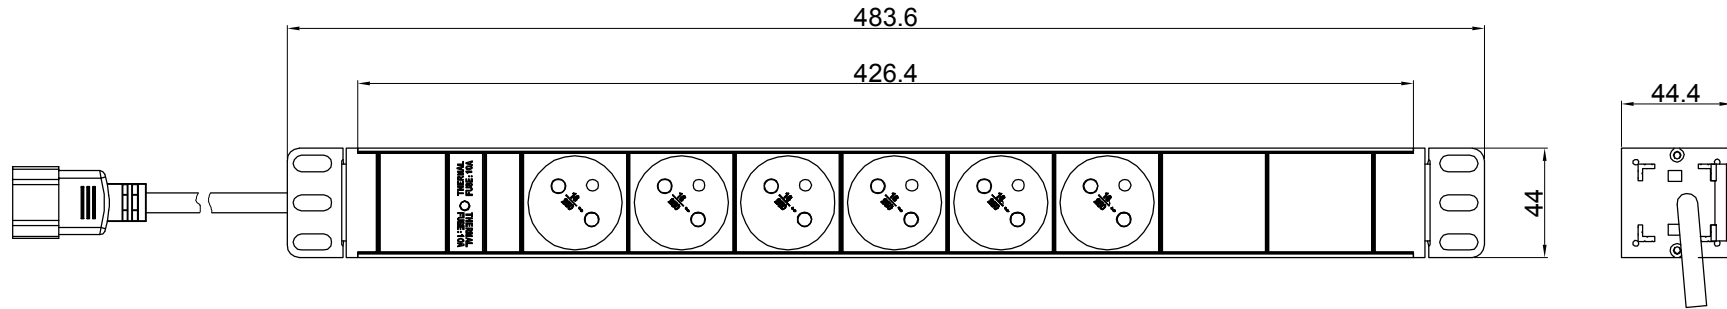

<p>Basic Series</p>	<p>OUTPUT</p> <p>(6) UTE (16A Rated)</p>	<p>OPERATING TEMPERATURE</p> <p>0° to 60°C</p>
<p>INPUT</p> <p>250VAC 10A 50HZ C14 plug 3M H05VV-F3G1.0mm² Power lead</p>	<p>BRANCH CIRCUITS</p> <p>(1) 10A Sangmao</p>	<p>MOUNTING ACCESORIES</p> <p>(2) 42 Bracket</p>

Revisions		
Rev	Description	Date

DRAWING TYPE		FNO4206C14H	
 <small>(NO PERMISSION, NO CHANGING)</small>			
unit=mm		Housing	Aluminium
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			Silver Oxidation
FILLET R0.5 ANGLE ±0.5° FIRST ANGLE 			
Power Meter SCALE 1:3		DATE 31-05-2017	