
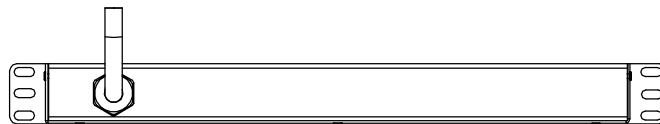
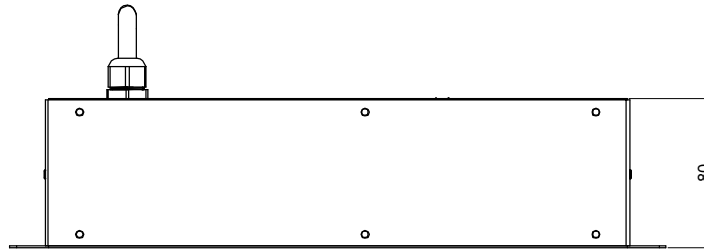



Copyright 2017 -

RoHS Compliant

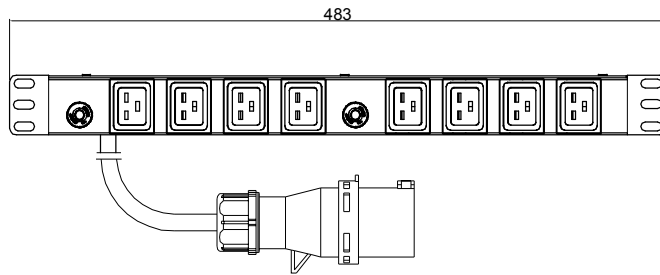

| | | |
|--|--|---|
| Basic Series | OUTPUT (8) IEC19 (16A Rated) | OPERATING TEMPERATURE 0° to 60°C |
| INPUT 250VAC 32A 50HZ IEC60309 32A 3P plug 3M H07RN-F3G4.0mm² Power lead | BRANCH CIRCUITS (2) 16A Overload | MOUNTING ACCESORIES (2) Metal Bracket |

| Revisions | | |
|-----------|-------------|------|
| Rev | Description | Date |
| | | |

| | | | |
|--|--------------|------------------------|--------------------|
| DRAWING TYPE <small>(NO PERMISSION, NO CHANGING)</small> | | IECO600832AHR | |
| unit=mm | | Housing | 1.5mm Steel |
| TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE | | | Red Powder coating |
| FILLET | R0.5 | | |
| ANGLE | ±0.5° | | |
| FIRST ANGLE | | | |
| SCALE 1:3 | | DATE 17-08-2017 | |