
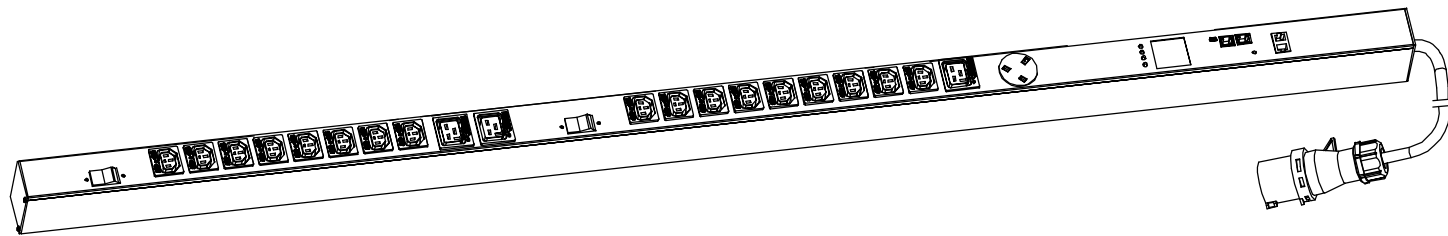
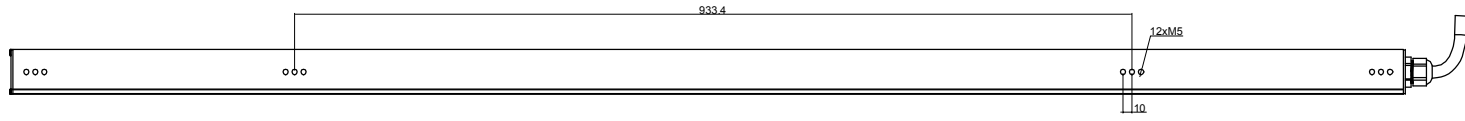



Copyright 2017 -

RoHS Compliant



PIM Series Inlet power monitoring Environmental monitoring	OUTPUT (17) IEC 60320 C13 Lock (10A Rated) (3) IEC 60320 C19 Lock (16A Rated) (1) UK Socket (13A Rated)	OPERATING TEMPERATURE 0° to 60°C	Revisions		
			Rev	Description	Date
INPUT 250VAC 32A 50HZ IEC60309 32A Commando plug 3M H07RN-F3G4mm² Power lead	BRANCH CIRCUITS (2) 1 Pole 16A Hydraulic-Magnetic Circuit Breaker	MOUNTING ACCESORIES (2) IPFIX001 (2) IPFIX002 (2) IPFIX003			

DRAWING TYPE		ENIECLKBNCBPIM4517030132AVTF	
 (NO PERMISSION, NO CHANGING)		unit=mm	Aluminium
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			Black Powder coating
FILLET R0.5 ANGLE ±0.5°		Housing	Top Feed
FIRST ANGLE 			
SCALE 1:3		DATE 24-02-2017	