
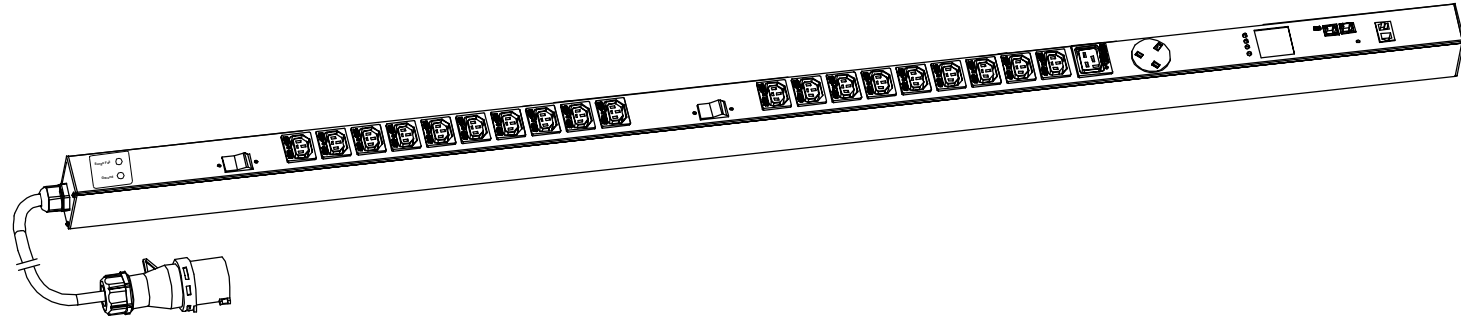
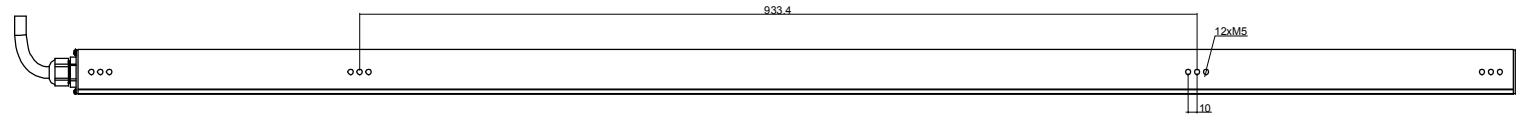






Copyright 2017 -

RoHS Compliant



<p>PIM Series</p> <p>Inlet power monitoring Environmental monitoring</p>	<p>OUTPUT</p> <p>(19) IEC 60320 C13 Lock (10A Rated) (1) IEC 60320 C19 Lock (16A Rated) (1) UK Socket (13A Rated)</p>	<p>OPERATING TEMPERATURE</p> <p>0° to 60°C</p>
<p>INPUT</p> <p>250VAC 32A 50HZ IEC60309 32A Commando plug 3M H07RN-F3G4mm² Power lead</p>	<p>BRANCH CIRCUITS</p> <p>(2) 1 Pole 16A Hydraulic-Magnetic Circuit Breaker (1) Surge Protector</p>	<p>MOUNTING ACCESORIES</p> <p>(2) IPFIX001 (2) IPFIX002 (2) IPFIX003</p>

Revisions		
Rev	Description	Date

DRAWING TYPE		ENIECLKBNVCBPIM4519010132AV	
 <small>(NO PERMISSION, NO CHANGING)</small>		unit=mm Aluminium Black Powder coating	
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE		Housing	
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE			
			
SCALE 1:3		DATE 24-02-2017	