
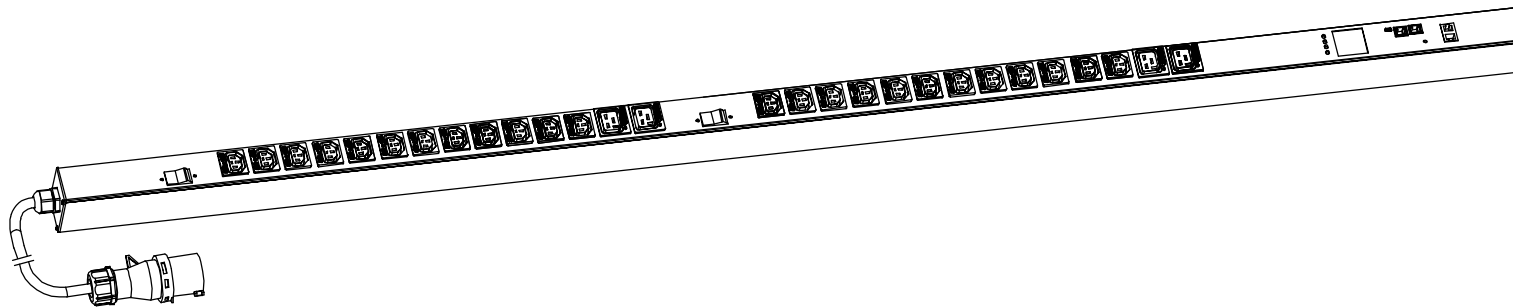






Copyright 2017 -

RoHS Compliant

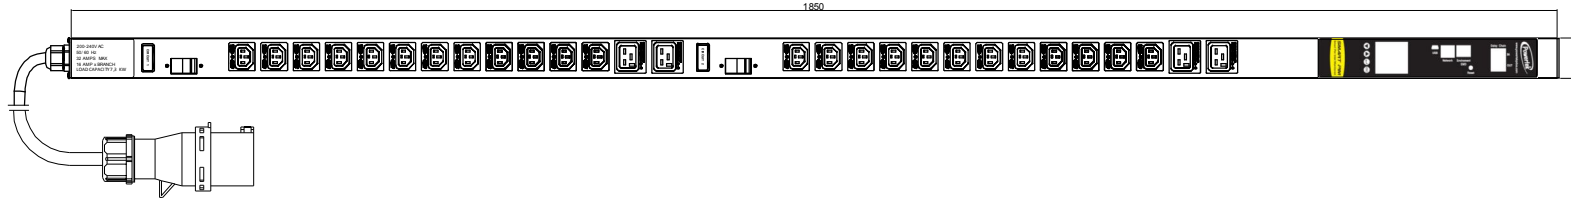

<p>PIM Series</p> <p>RCM Bender device A3 Inlet Power monitoring Environmental monitoring</p>	<p>OUTPUT</p> <p>(24) IECC13 Lock (10A Rated) (4) IECC19 Lock (16A Rated)</p>	<p>OPERATING TEMPERATURE</p> <p>0° to 60°C</p>
<p>INPUT</p> <p>250VAC 32A 50HZ IEC60309 32A 3Pin plug 3M LSZH 3G4mm² Power lead</p>	<p>BRANCH CIRCUITS</p> <p>(2) 1 Pole Magnetic Hydraulic CB 16A</p>	<p>MOUNTING ACCESORIES</p> <p>(2) IPFIX001 (2) IPFIX002 (2) IPFIX003</p>

Revisions		
Rev	Description	Date

DRAWING TYPE		ENIECLKCBPIM45240432AZHVRCM	
 <small>(NO PERMISSION, NO CHANGING)</small>		Housing	Aluminium
unit=mm			Black Powder coating
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			
FILLET	R0.5		
ANGLE	±0.5°		
SCALE 1:3		DATE 08-03-2017	