







# ENIECPIM45360616A3PV

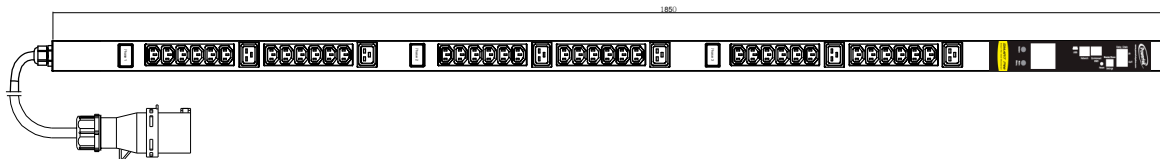

FEATURES	
Technology	PIM (Per inlet Monitoring)
Energy Metering	Voltage (V), Current (A), Active Power (kW), Real Power (kVA), Power Factor
Metering per Input Line	Yes
Metering per Output Receptacle	No
Remote Outlet Switching	No
Environmental port	Yes
Networking	HTTP(s); SSH; RS-485 (Serial); Power IQ; SNMP v1/v2/v3; SMTP, MODBUS
Remote Management	Yes
Daisy Chain	Yes
Display	Yes (LCD selectable Display)
Environmental Sensors	All in one Temperature and Humidity sensor with 2 digital inputs (for connect air flow, door sensor, water leak, smoke detector and Vibration sensor)
INPUT	
Plug	IEC 60309 3 P+N+E 16A 380V SINGLE PHASE
Lead length	3 Meters
Cable type	H07RN-F5G2.5 mm <sup>2</sup>
Max. Input Load	16A
Rated Input voltage	380-400V 3 Phase
Frequency	50-60Hz
Power capacity	11.2KW
OUTPUT	
Rated Output voltage	190-240V Single phase
Output types	36 IEC 60320 C13 (10Amps)+6 IEC 60320 C19 (16Amps)
Overload Protection	(NONE)
CHASIS	
Dimensions (W x D x H)	1850 x 72 x 50 mm
Color	Black powder coat
Mounting Options	IPFIX001; IPFIX002; IPFIX003
OPERATING ENVIRONMENTAL	
Temperature Range	0° to 60° C (30° to 140° F)
Relative humidity	0 - 95 %
Elevation	0 - 4000 Meters
CONFORMANCE	
CE, RoHS Compliant, IEC 60950-1	



Copyright 2015 -

RoHS Compliant

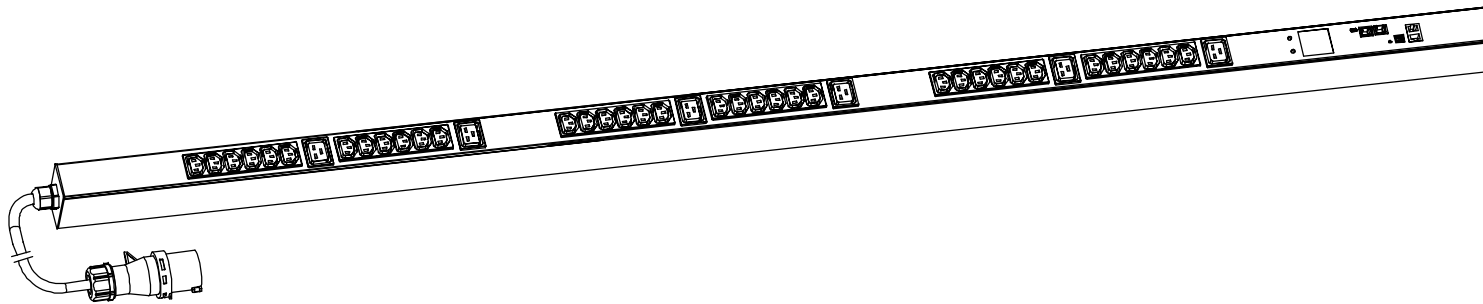

<p><b>PIM Series</b></p> <p>Inlet power monitored Environmental monitoring</p>	<p><b>OUTPUT</b></p> <p>(36) IEC 60320 C13 (10A Rated) (6) IEC 60320 C19 (16A Rated)</p>	<p><b>OPERATING TEMPERATURE</b></p> <p>0° to 60°C</p>
<p><b>INPUT</b></p> <p>380VAC 16A 50HZ IEC60309 16A 5PIN plug 3M H07RN-F5G2.5mm² Power lead</p>	<p><b>BRANCH CIRCUITS</b></p> <p>(NONE)</p>	<p><b>MOUNTING ACCESORIES</b></p> <p>(2) IPFIX001 (2) IPFIX002 (2) IPFIX003</p>

Revisions		
Rev	Description	Date

<p>DRAWING TYPE</p>  <p>(NO PERMISSION, NO CHANGING)</p>		<p><b>ENIECPIM45360616A3PV</b></p>	
<p><b>unit=mm</b></p>		<p><b>Housing</b></p>	<p>Aluminium</p>
<p>TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE</p>			<p>Black Powder coating</p>
<p><b>FILLET</b></p> <p>R0.5</p>	<p><b>ANGLE</b></p> <p>±0.5°</p>	<p>DATE 11-11-2015</p>	
<p>FIRST ANGLE</p> 			
<p>SCALE 1:3</p>		<p>DATE 11-11-2015</p>	