


1 2 3 4 5 6 7 8


A

A

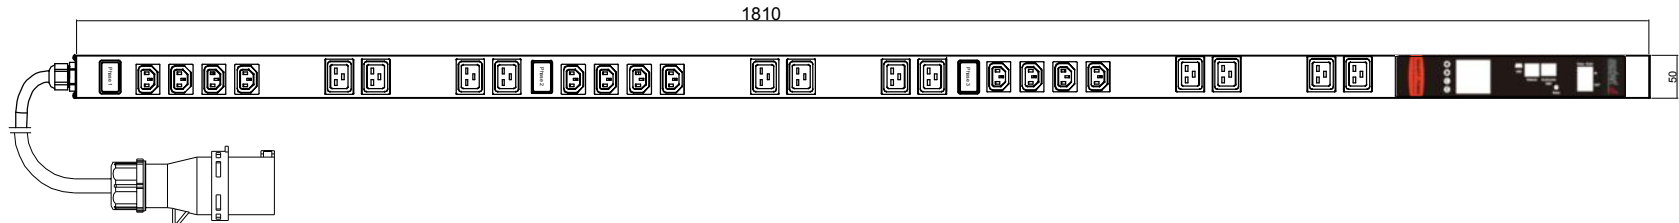

B

B

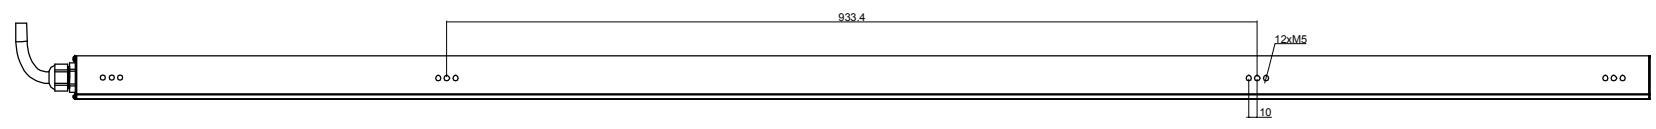


C

C



D

D

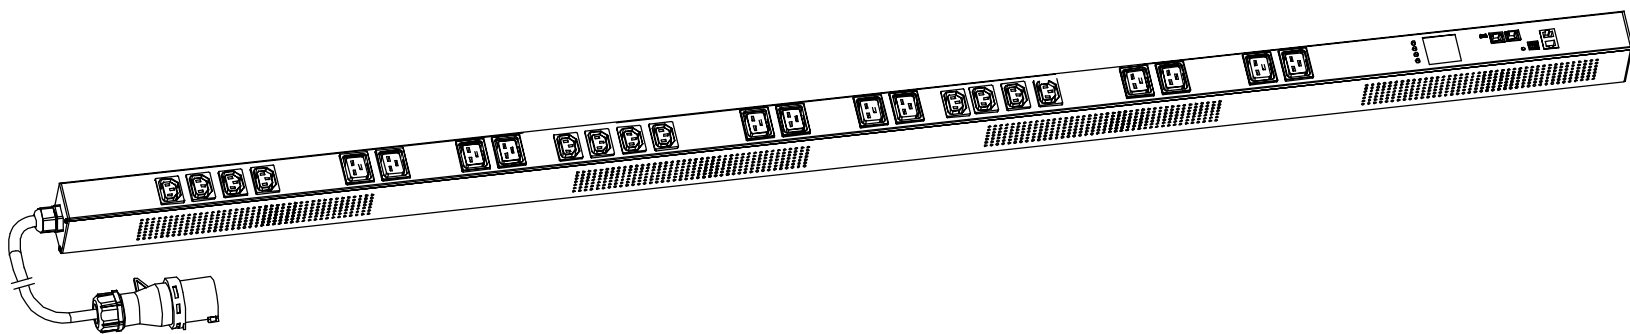


E

E

<p>POMS Series</p> <p>Inlet monitored Per outlet monitoring and switching Environmental monitoring</p>	<p>OUTPUT</p> <p>(12) IEC 60320 C13 (10A Rated) (12) IEC 60320 C19 (16A Rated)</p>	<p>OPERATING TEMPERATURE</p> <p>30° to 140° 0° to 60°</p>
<p>INPUT</p> <p>400VAC 16A 50HZ IEC60309 16A 5P plug 3M H07RN-F5G2.5mm² Power lead</p>	<p>BRANCH CIRCUITS</p> <p>(NONE)</p>	<p>MOUNTING ACCESORIES</p> <p>(2) IPFIX001 (2) IPFIX002 (2) IPFIX003</p>

DRAWING TYPE



(NO PERMISSION, NO CHANGING)

ENIECPOMS45121216A3PV


TECHNICAL STANDARD
1.IT11;
2.NO RUSTNESS
3.NO FLAW ON THE SURFACE

MATERIAL:	Aluminum
	Black Powder Coating

FILLET R0.5

ANGLE ±0.5°

FIRST ANGLE



SCALE 1:3

DATE 05-05-2017

1 2 3 4 5 6 7 8

F

F