
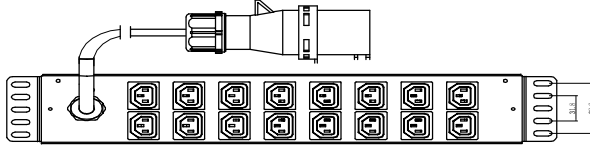



ENCBPOS601632AH

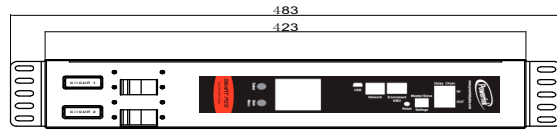

FEATURES

| | |
|--------------------------------|---|
| Technology | POS (Per outlet Switching) |
| Energy Metering | Voltage (V), Current (A), Active Power (kW), Real Power (kVA), Power Factor |
| Metering per Input Line | Yes (Branch Circuit and Total Current) |
| Metering per Output Receptacle | No |
| Remote Outlet Switching | Yes |
| Environmental port | Yes |
| Networking | HTTP(s); SSH; RS-485 (Serial); Power IQ; SNMP v1/v2/v3; SMTP, MODBUS |
| Remote Management | Yes |
| Daisy Chain | Yes |
| Display | Yes (LCD selectable Display) |
| Environmental Sensors | All in one Temperature and Humidity sensor with 2 digital inputs (for connect air flow, door sensor, water leak, smoke detector and Vibration sensor) |

INPUT

| | |
|---------------------|---|
| Plug | IEC 60309 1 P+N+E 32A 250V SINGLE PHASE |
| Lead length | 3 Meters |
| Cable type | H07RN-F3G4.0 mm ² |
| Max. Input Load | 32A |
| Rated Input voltage | 190-240V Single phase |
| Frequency | 50-60Hz |
| Power capacity | 7.3KW |

OUTPUT

| | |
|----------------------|--------------------------------------|
| Rated Output voltage | 190-240V Single phase |
| Output types | 16 IEC 60320 C13 (10Amps) |
| Overload Protection | 2 Single Pole 16A magnetic-Hydraulic |

CHASIS

| | |
|------------------------|---------------------|
| Dimensions (W x D x H) | 483 x 183 x 87.5 mm |
| Color | Black powder coat |
| Mounting Options | 2 Meter Bracker |

OPERATING ENVIRONMENTAL







| | |
|-------------------|-----------------------------|
| Temperature Range | 0° to 60° C (30° to 140° F) |
| Relative humidity | 0 - 95 % |
| Elevation | 0 - 4000 Meters |

CONFORMANCE

CE, RoHS Compliant, IEC 60950-1

Copyright 2015 -

RoHS Compliant

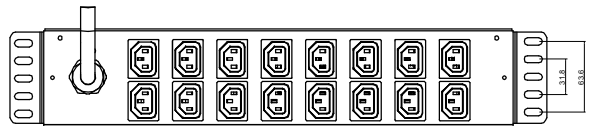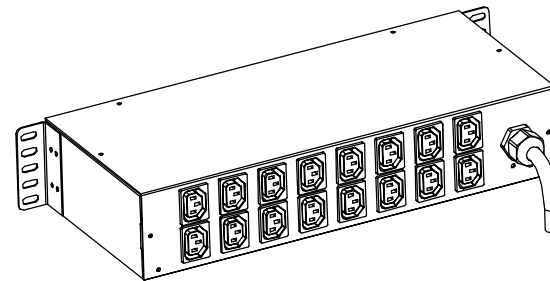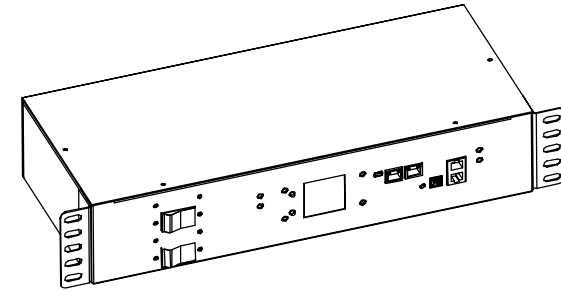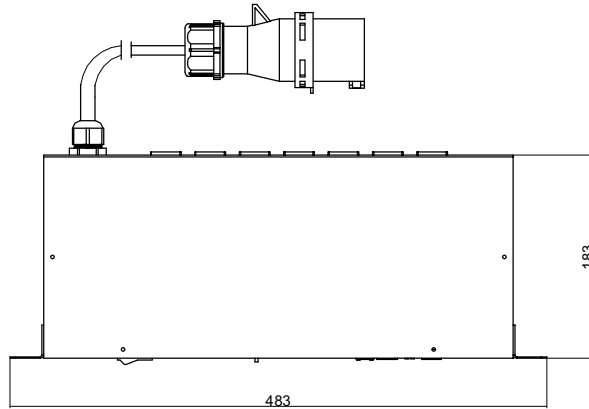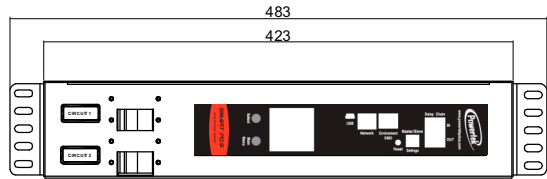

| | | |
|---|---|---|
| <p>POS Series Inlet Power monitoring Per outlet Switching Environmental monitoring</p> | <p>OUTPUT (16) IECC13 Socket (10A Rated)</p> | <p>OPERATING TEMPERATURE 0° to 60°C</p> |
| <p>INPUT 250VAC 32A 50HZ IEC60309 32A Commando plug 3M H07RN-F3G4.0mm² Power lead</p> | <p>BRANCH CIRCUITS (2) 2 Pole 16A Hydraulic-Magnetic</p> | <p>MOUNTING ACESORIES (2)Metal Bracket</p> |

| Revisions | | |
|-----------|-------------|------|
| Rev | Description | Date |
| | | |

| | | |
|--|-------------------------------|-----------------------------|
| <p>DRAWING TYPE (NO PERMISSION NO CHANGING)</p> | <p>ENCBPOS601632AH</p> | |
| <p>unit=mm</p> | <p>Housing</p> | <p>Steel=1.5mm</p> |
| <p>TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE</p> | | <p>Black Powder coating</p> |
| <p>FILLET R0.5</p> | <p>ANGLE ±0.5°</p> | <p>DATE 17-11-2015</p> |
| <p>FIRST ANGLE </p> | | |
| <p>SCALE 1:3</p> | | <p>DATE 17-11-2015</p> |