

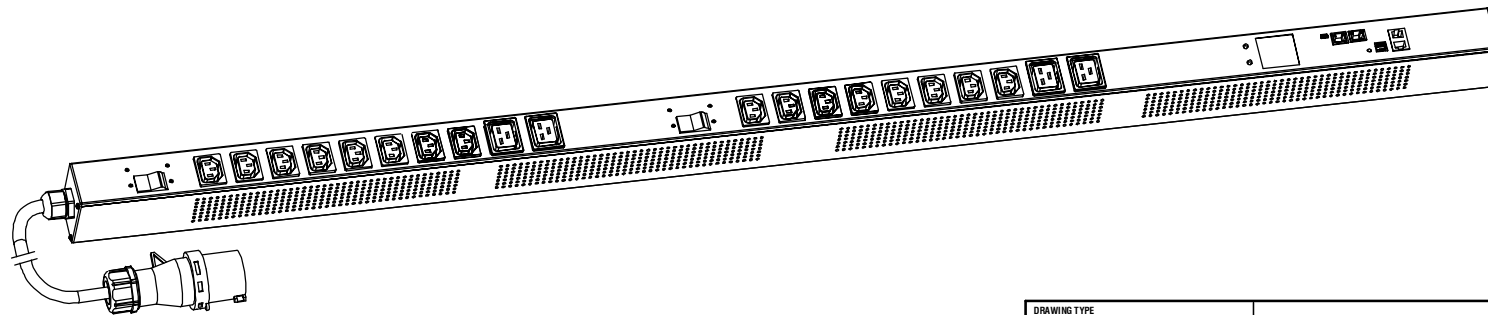





Copyright 2015 - excel

RoHS Compliant

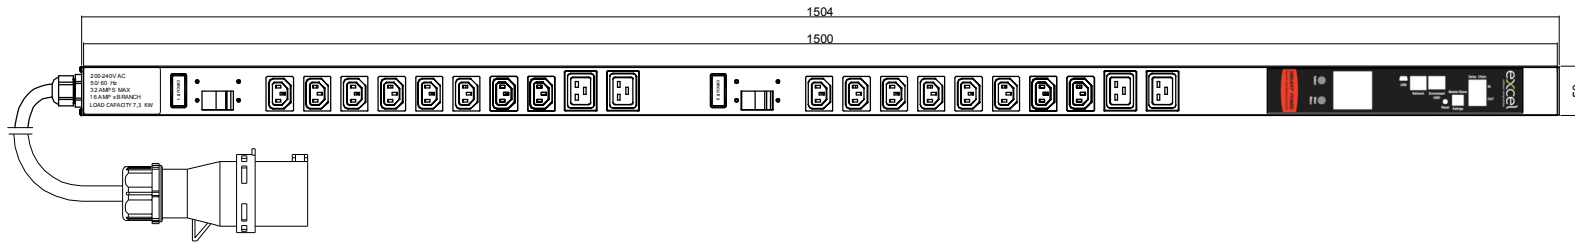

<p>POS Series</p> <p>Inlet Power monitoring Per outlet Switching Environmental monitoring</p>	<p>OUTPUT</p> <p>(16) IEC 60320 C13 (10A Rated) (4) IEC 60320 C19 (16A Rated)</p>	<p>OPERATING TEMPERATURE</p> <p>0° to 60°C</p>
<p>INPUT</p> <p>250VAC 32A 50HZ IEC60309 32A Commando plug 3M H07RN-F3G4mm² Power lead</p>	<p>BRANCH CIRCUITS</p> <p>(2) 2 Pole 16A Hydraulic-Magnetic Circuit Breaker</p>	<p>MOUNTING ACCESORIES</p> <p>(2) IPFIX001 (2) IPFIX002 (2) IPFIX003</p>

Revisions		
Rev	Description	Date

DRAWING TYPE		ENIECCBPOS45160432AV	
 <small>(NO PERMISSION, NO CHANGING)</small>		Housing Aluminium Black Powder coating	
unit=mm TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			
FILLET	R0.5	 without compromise. DATE 08-10-2015	
ANGLE	±0.5°		
FIRST ANGLE			
SCALE 1:3			