

1 2 3 4 5 6 7 8

A




B

C



D


E

F

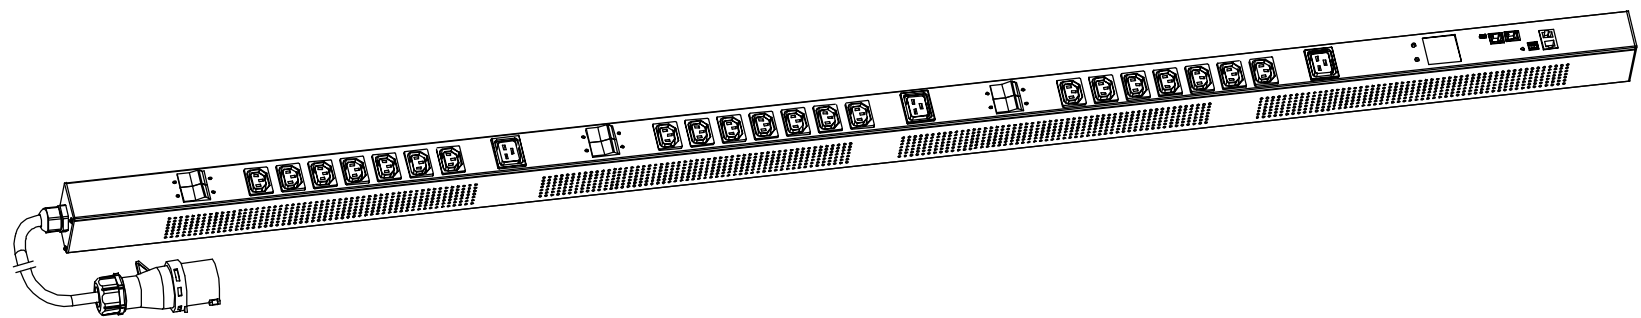

<p>POS Series</p> <p>Input Power monitoring Per outlet switching Environmental monitoring</p>	<p>OUTPUT</p> <p>(21) IEC 60320 C13 (10A Rated) (3) IEC 60320 C19 (16A Rated)</p>	<p>OPERATING TEMPERATURE</p> <p>0° to 60°C</p>
<p>INPUT</p> <p>400VAC 32A 50HZ IEC60309 32A 5PIN plug 3M H07RN-F5G6mm Power lead</p>	<p>BRANCH CIRCUITS</p> <p>(6) 1 Pole Magnetic Hydraulic CB UL489 listed</p>	<p>MOUNTING ACCESORIES</p> <p>(2) IPFIX001 (2) IPFIX002 (2) IPFIX003</p>

DRAWING TYPE	
 (NO PERMISSION, NO CHANGING)	
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE	
FILLET	R0.5
ANGLE	±0.5°
FIRST ANGLE	
SCALE 1:3	

ENIECCBPOS45210332A3PV	
MATERIAL:	Aluminum
	Black Powder Coating
	
DATE 22-10-2015	

1 2 3 4 5 6 7 8