
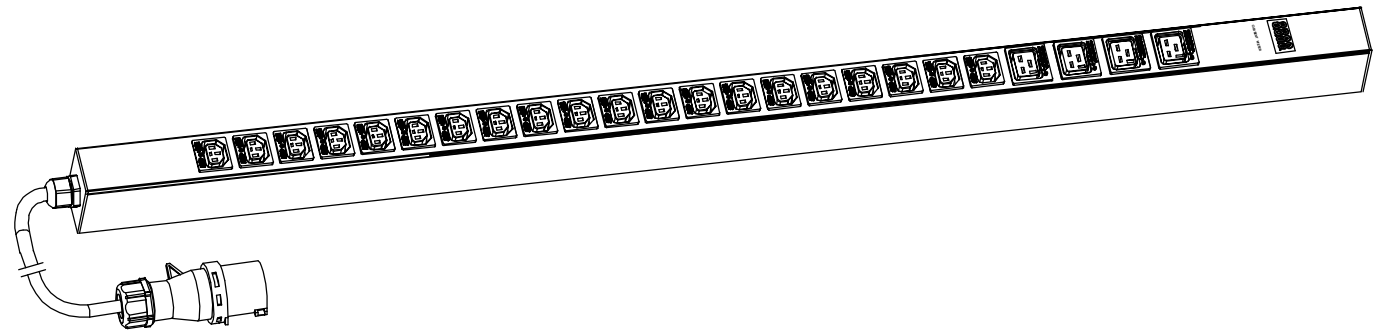





Copyright 2017 -

RoHS Compliant

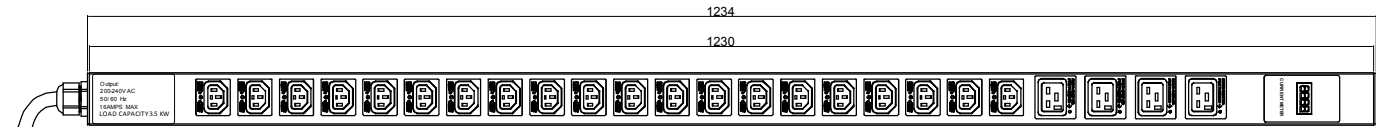

<b>Basic Series</b>	<b>OUTPUT</b>	<b>OPERATING TEMPERATURE</b>
Current Meter	(20) IECC13 Locking (10A Rated) (4) IECC19 Locking (16A Rated)	0° to 60°C
<b>INPUT</b>	<b>BRANCH CIRCUITS</b>	<b>MOUNTING ACCESORIES</b>
250VAC 16A 50HZ IEC60309 16A plug 3M H05VV-F 3G2.5mm <sup>2</sup> Power lead	(NONE)	(2) IPFIX001 (2) IPFIX002 (2) IPFIX003

Revisions		
Rev	Description	Date

DRAWING TYPE  (NO PERMISSION, NO CHANGING)		<b>ENIECLKM45200416AV</b>	
<b>unit=mm</b>		<b>Housing</b>	Aluminium
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			Black Powder Coating
<b>FILLET</b>	R0.5	DATE 18-05-2017	
<b>ANGLE</b>	±0.5°		
<b>FIRST ANGLE</b> 			
<b>SCALE 1:3</b>			