
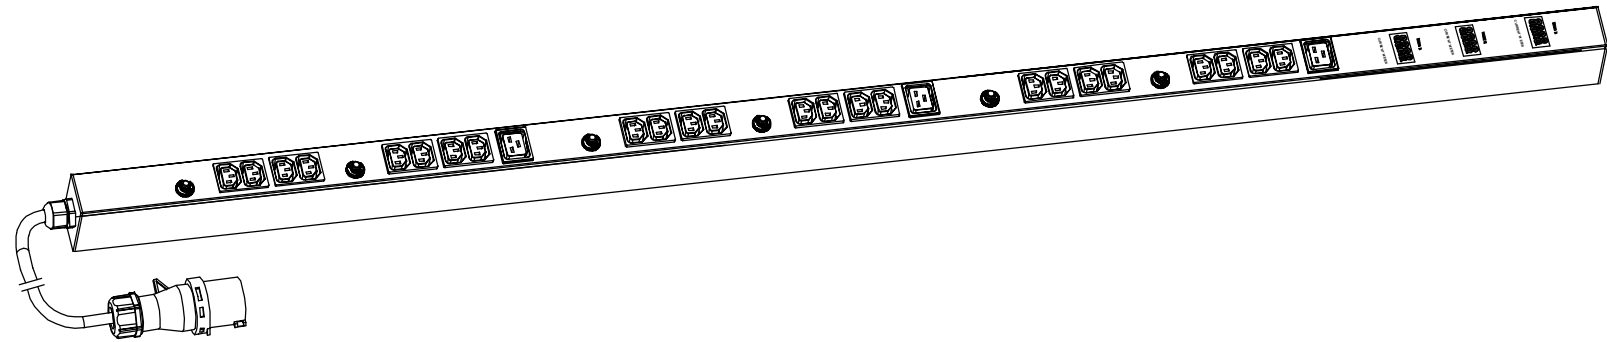






Copyright 2016 -

RoHS Compliant



<p>Basic Series</p> <p>(3) Current Meter</p>	<p>OUTPUT</p> <p>(24) IEC 60320 C13 (10A Rated)</p> <p>(3) IEC 60320 C19 (16A Rated)</p>	<p>OPERATING TEMPERATURE</p> <p>0° to 60°C</p>
<p>INPUT</p> <p>400VAC 32A 50HZ</p> <p>IEC60309 32A 3Phase plug</p> <p>3M H07RN-F5G6.0mm² Power lead</p>	<p>BRANCH CIRCUITS</p> <p>(6) 16A Overload</p>	<p>MOUNTING ACCESORIES</p> <p>(2) IPFIX001</p> <p>(2) IPFIX002</p> <p>(2) IPFIX003</p>

Revisions		
Rev	Description	Date

DRAWING TYPE		ENIECOM45240332A3PV	
 <small>(NO PERMISSION, NO CHANGING)</small>		Aluminium	
unit=mm		Black Powder Coating	
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE		Housing	
FILLET R0.5 ANGLE ±0.5° FIRST ANGLE 			
SCALE 1:3		DATE 20-05-2017	