
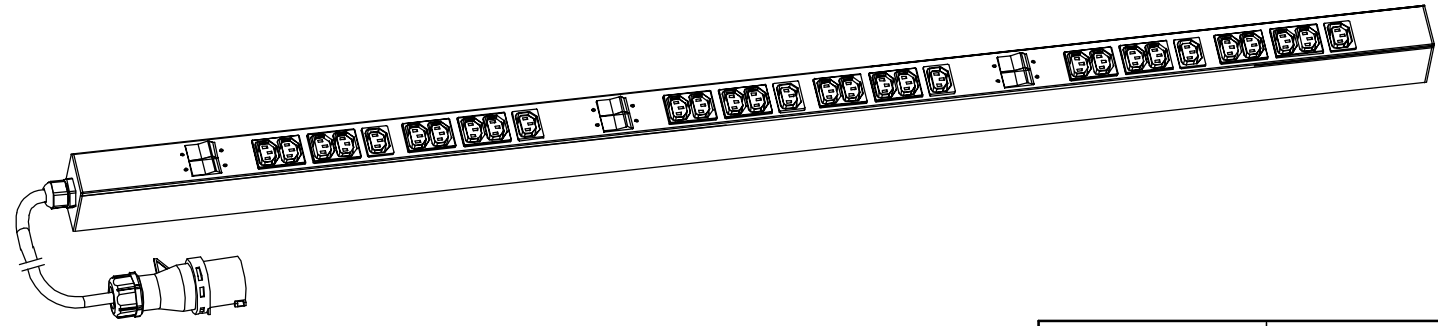





Copyright 2015 -

RoHS Compliant



Basic Series	OUTPUT (30) IEC 60320 C13 (10A Rated)	OPERATING TEMPERATURE 0° to 60°C
INPUT 400VAC 32A 50HZ IEC60309 32A 3Phase plug 3M H07RN-F5G6.0mm ² Power lead	BRANCH CIRCUITS (6) Single Pole Magnetic Hidraulic CB	MOUNTING ACCESORIES (2) IPFIX001 (2) IPFIX002 (2) IPFIX003

Revisions		
Rev	Description	Date

DRAWING TYPE (NO PERMISSION, NO CHANGING)		ENCB453032A3PVGR	
unit=mm		Housing	Aluminium
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			Grey TX401 0.5gr Oxidation
FILLET	R0.5	DATE 14-11-2015	
ANGLE	±0.5°		
FIRST ANGLE 			
SCALE 1:3			