Copyright 2015 -

RoHS Compliant

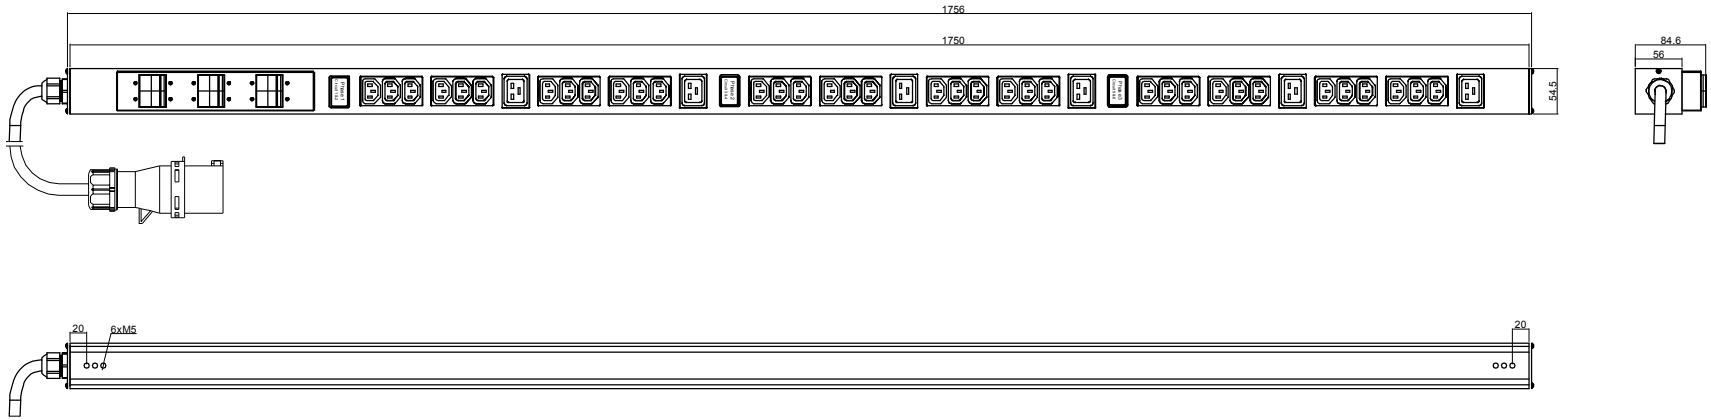

2xBrackets



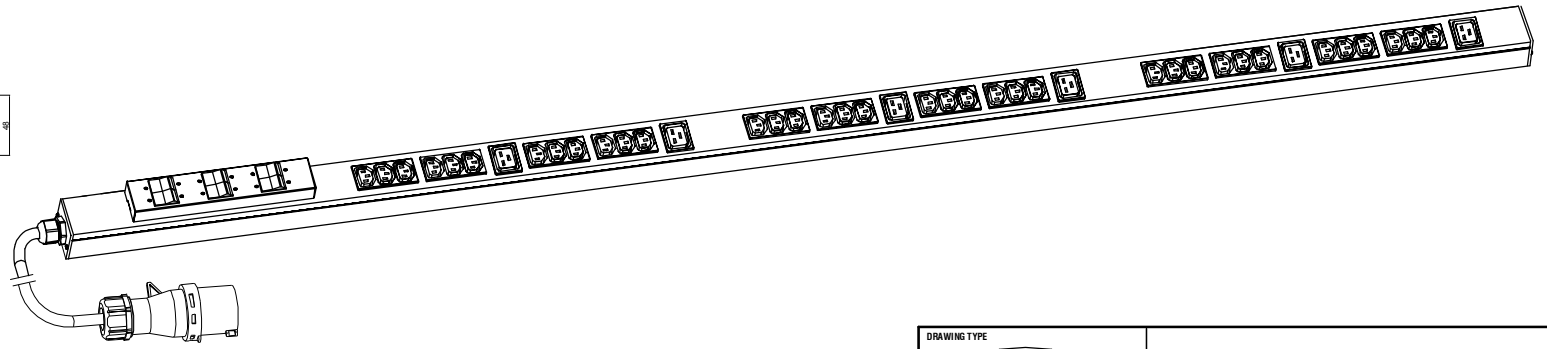

Basic Series	**OUTPUT** (36) IECC13 (10A Rated) (6) C19 (16A Rated)	**OPERATING TEMPERATURE** 0° to 60°C
INPUT 380VAC 32A 50HZ IEC60309 32A 5PIN plug 3M H07RN-F5G6.0mm ² Power lead	**BRANCH CIRCUITS** (6) 1 Pole 16A Hydraulic-Magnetic Circuit Breaker	**MOUNTING ACCESORIES** (2) IPFIX001

Revisions		
Rev	**Description**	**Date**

DRAWING TYPE
CATIA
(NO PERMISSION.NO CHANGING)

unit=mm

TECHNICAL STANDARD
1.IT11;
2.NO RUSTNESS
3.NO FLAW ON THE SURFACE

FILLET	**R0.5**
ANGLE	**±0.5°**

FIRST ANGLE

SCALE 1:3

ENIECCB46360632A3PV

Housing	Aluminium
	Black Powder coating

DATE 06-11-2015