
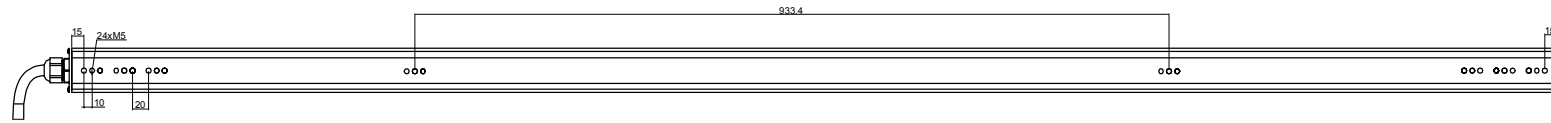
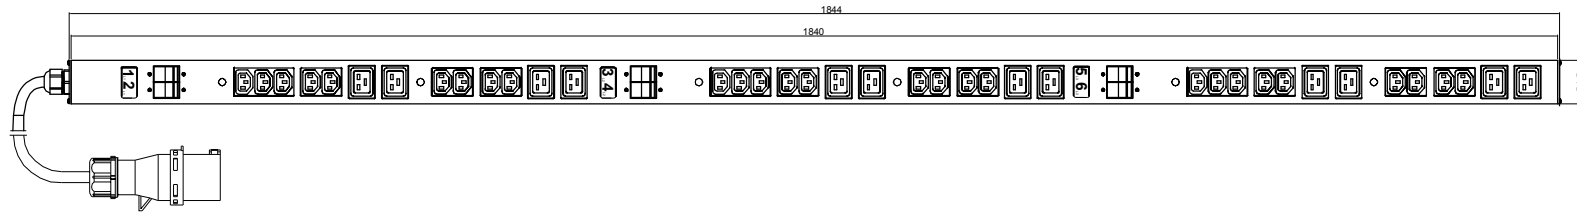
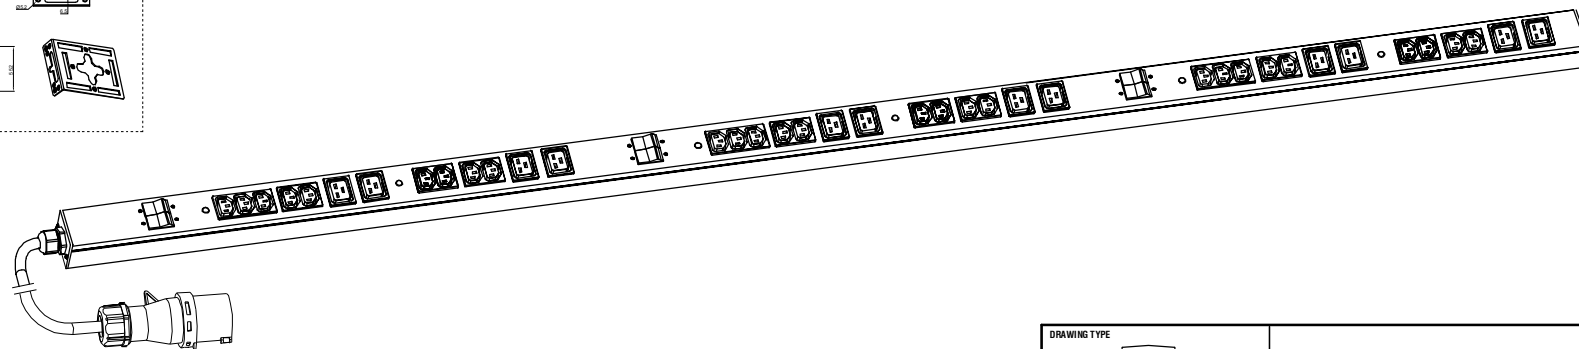


Copyright 2016 -

RoHS Compliant





2xMT271 Brackets



<p><b>Basic Series</b></p> <p>(6) Blue LED</p>	<p><b>OUTPUT</b></p> <p>(27) IECC13 (10A Rated)</p> <p>(12) C19 (16A Rated)</p>	<p><b>OPERATING TEMPERATURE</b></p> <p>0° to 60°C</p>
<p><b>INPUT</b></p> <p>380VAC 32A 50HZ</p> <p>IEC60309 32A 5PIN plug</p> <p>3M H07RN-F5G6.0mm<sup>2</sup> Power lead</p>	<p><b>BRANCH CIRCUITS</b></p> <p>(6) 1 Pole 16A L-Series Carling Breaker</p>	<p><b>MOUNTING ACCESORIES</b></p> <p>(2) Button Mounting</p> <p>(2) MT271</p>

Revisions		
Rev	Description	Date

DRAWING TYPE		ENIECCBL46271232A3PV	
 <small>(NO PERMISSION, NO CHANGING)</small>		Aluminium	
<b>unit=mm</b>		Black Powder coating	
<b>TECHNICAL STANDARD</b> 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE		Housing	
<b>FILLET</b> R0.5 <b>ANGLE</b> ±0.5°			
<b>FIRST ANGLE</b> 			
SCALE 1:3		DATE 28-03-2017	