
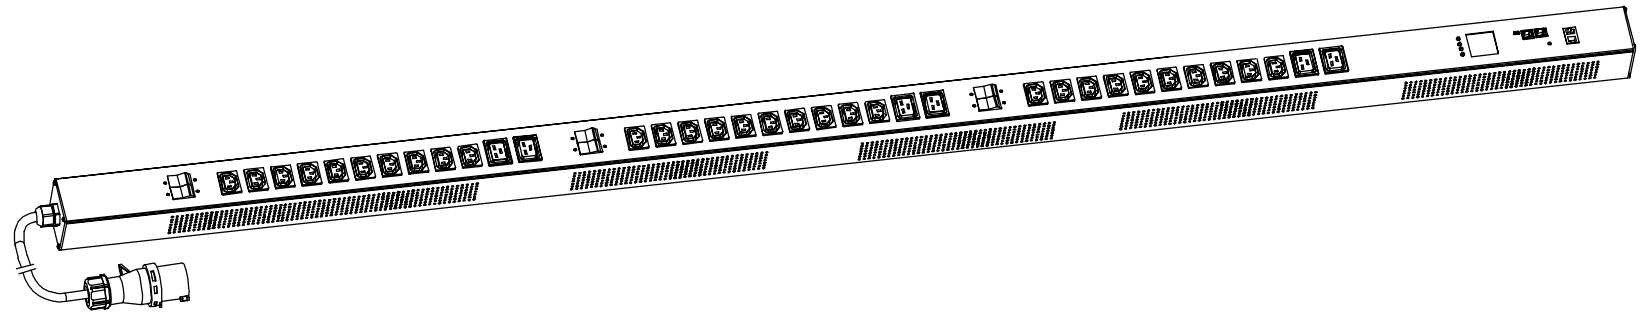



Copyright 2017 -



<p>POS Series Input Power monitoring Per outlet switching Environmental monitoring RCM means BENDER device inside</p>	<p>OUTPUT (30) IEC 60320 C13 (10A Rated) (6) IEC 60320 C19 (16A Rated)</p>	<p>OPERATING TEMPERATURE 0° to 60°C</p>
<p>INPUT 400VAC 32A 50HZ IEC60309 32A 5PIN plug 3M H07RN-F5G6mm Power lead</p>	<p>BRANCH CIRCUITS (6) 1 Pole Magnetic Hydraulic CB UL489 listed</p>	<p>MOUNTING ACCESORIES (2) IPFIX001 (2) IPFIX002 (2) IPFIX003</p>

<p>DRAWING TYPE  (NO PERMISSION, NO CHANGING)</p>		<p>ENIECCBPOS50300632A3PVRCM</p>	
<p>TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE</p>		<p>MATERIAL: Aluminum Black Powder Coating</p>	
<p>FILLET</p>	<p>R0.5</p>		
<p>ANGLE</p>	<p>±0.5°</p>	<p>DATE 08-05-2017</p>	
<p>FIRST ANGLE </p>			