


# ENIECCBPM45360632AV





1620

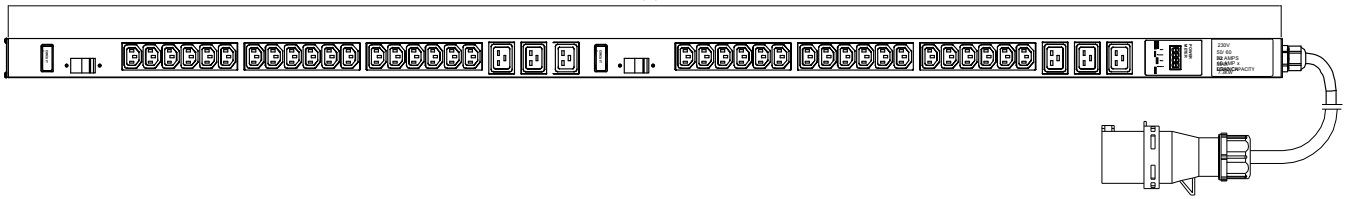

FEATURES	
Technology	Power Meter (LED)
Energy Metering	Voltage (V), Current (A), Active Power (W), Power Factor
Metering per Input Line	( Total Current)
Metering per Output Receptacle	No
Remote Outlet Switching	No
Environmental port	No
Networking	No
Remote Management	No
Daisy Chain	No
Display	Yes (LEDScrolling Display)
Environmental Sensors	No
INPUT	
Plug	IEC 60309 1 P+N+E 32A 250V SINGLE PHASE
Lead length	3 Meters, TOP FED
Cable type	H07RN-F3G4.0 mm <sup>2</sup>
Max. Input Load	32A
Rated Input voltage	190-240V SINGLE PHASE
Frequency	50-60Hz
Power capacity	7.3KW
OUTPUT	
Rated Output voltage	190-240V Single phase
Output types	36 IEC 60320 C13 (10Amps)+6 IEC 60320 C19 (16Amps)
Overload Protection	2 Single Pole Magnetic Hydraulic CB UI489 Listed
CHASIS	
Dimensions (W x D x H)	1620 x 72 x 50 mm
Color	Black powder coat
Mounting Options	IPFIX001; IPFIX002; IPFIX003
OPERATING ENVIRONMENTAL	
Temperature Range	0° to 60° C (30° to 140° F)
Relative humidity	0 - 95 %
Elevation	0 - 4000 Meters
CONFORMANCE	
CE, RoHS Compliant, IEC 60950-1	

Copyright 2015 -

RoHS Compliant

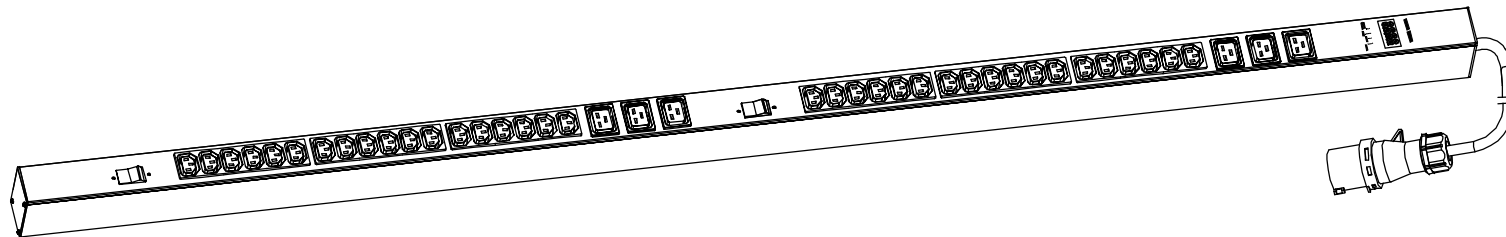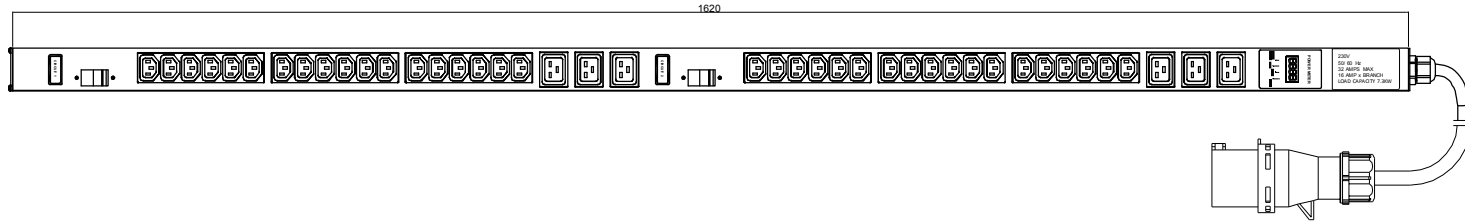

<p><b>PIM Series</b></p> <p>Inlet power monitoring Environmental monitoring</p>	<p><b>OUTPUT</b></p> <p>(36) IECC13 Socket (10A Rated) (6) C19 Socket (16A Rated)</p>	<p><b>OPERATING TEMPERATURE</b></p> <p>0° to 60°C</p>
<p><b>INPUT</b></p> <p>250VAC 32A 50HZ IEC60309 32A Commando plug 3M H07RN-F3G4mm Power lead</p>	<p><b>BRANCH CIRCUITS</b></p> <p>(2) 1 Pole Magnetic Hydraulic CB UL489 listed</p>	<p><b>MOUNTING ACCESORIES</b></p> <p>(2) IPFIX001 (2) IPFIX002 (2) IPFIX003</p>

Revisions		
Rev	Description	Date

DRAWING TYPE		ENIECCBPM45360632AVTF	
 (NO PERMISSION, NO CHANGING)		Housing	Aluminium
unit=mm  TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			Black Powder coating
FILLET	R0.5	DATE 06-11-2015	
ANGLE	±0.5°		
FIRST ANGLE			
SCALE 1:3			