
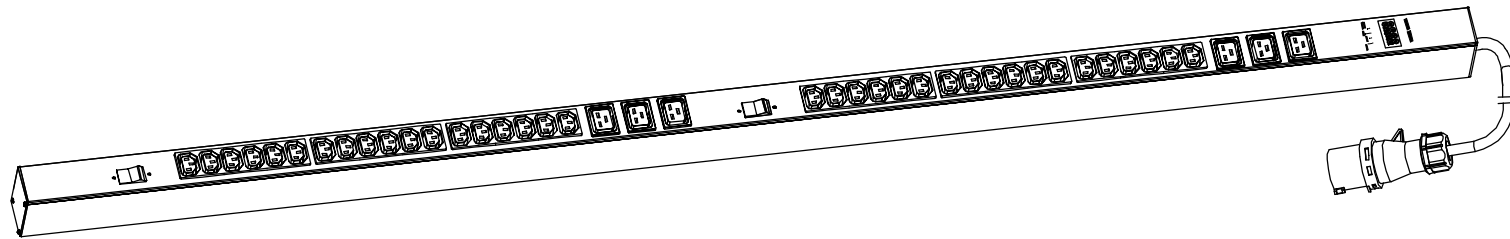

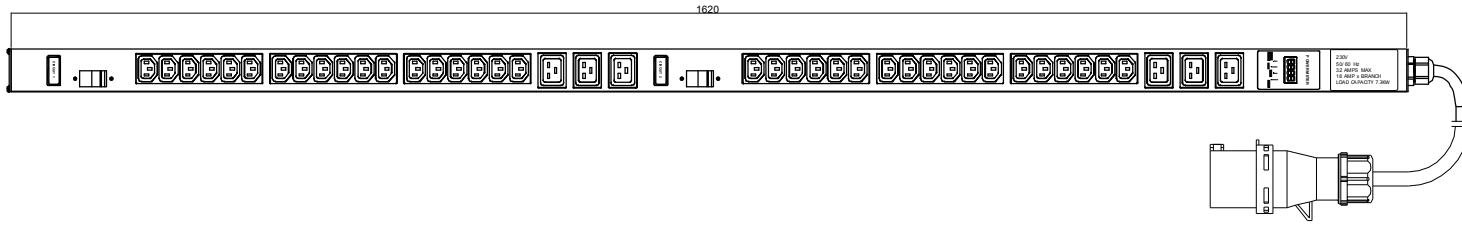




Copyright 2016 -

RoHS Compliant



<p>PM Series</p> <p>Power Meter</p>	<p>OUTPUT</p> <p>(36) IECC13 Socket (10A Rated) (6) C19 Socket (16A Rated)</p>	<p>OPERATING TEMPERATURE</p> <p>0° to 60°C</p>
<p>INPUT</p> <p>250VAC 32A 50HZ IEC60309 32A Commando plug 3M H07RN-F3G4mm Power lead</p>	<p>BRANCH CIRCUITS</p> <p>(2) 1 Pole Magnetic Hydraulic CB 16A UL489 listed</p>	<p>MOUNTING ACCESORIES</p> <p>(2) IPFIX001 (2) IPFIX002 (2) IPFIX003</p>

Revisions		
Rev	Description	Date

DRAWING TYPE		ENIECCBPM45360632AVTF	
 <small>(NO PERMISSION, NO CHANGING)</small>		Housing	Aluminium
unit=mm			Black Powder coating
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			Top Feed
FILLET R0.5 ANGLE ±0.5°			
FIRST ANGLE		DATE 27-07-2016	
SCALE 1:3			