
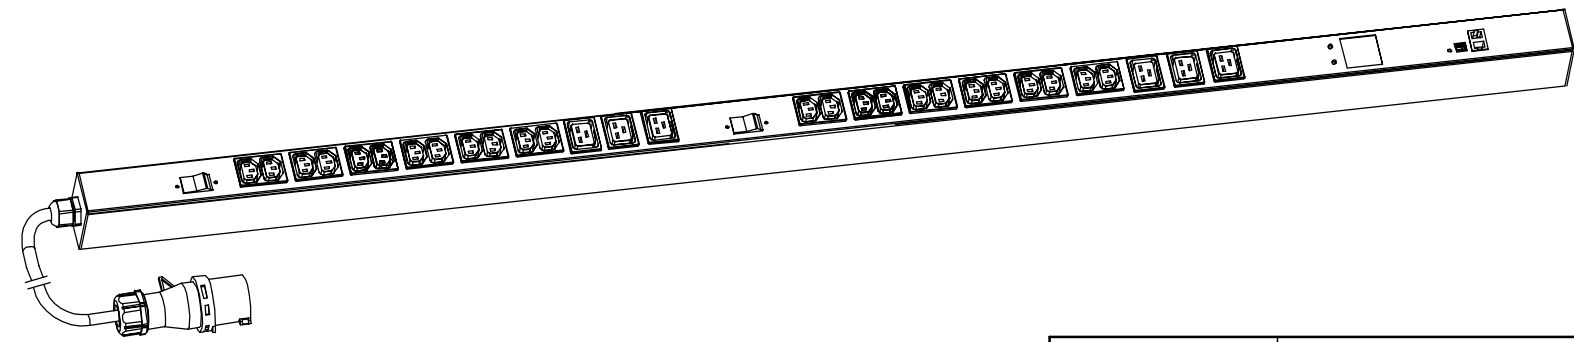





Copyright 2016 -

RoHS Compliant

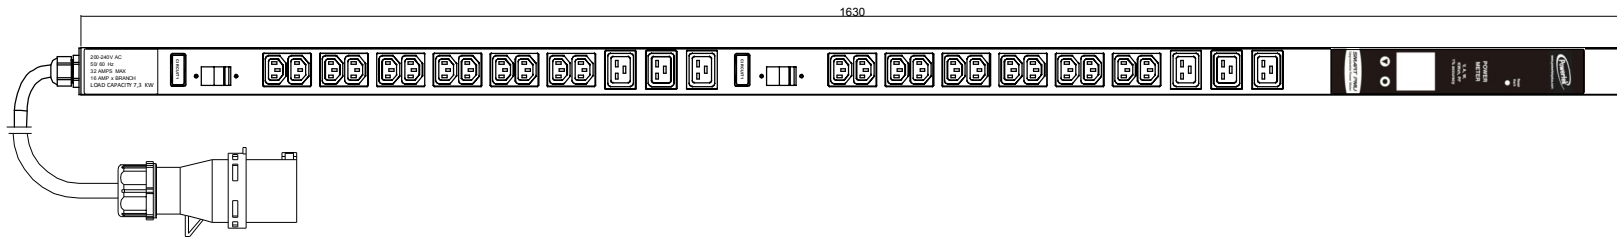

<p>PMU Series</p> <p>Power Meter Grey Chasis</p>	<p>OUTPUT</p> <p>(24) IEC 60320 C13 (10A Rated) (6) IEC 60320 C19 (16A Rated)</p>	<p>OPERATING TEMPERATURE</p> <p>0° to 60°C</p>
<p>INPUT</p> <p>250VAC 32A 50HZ IEC60309 32A plug 3M H07RN-F3G4.0mm Power lead</p>	<p>BRANCH CIRCUITS</p> <p>(2) 1 Pole Magnetic Hidraulic CB 16A</p>	<p>MOUNTING ACCESORIES</p> <p>(2) IPFIX001 (2) IPFIX002 (2) IPFIX003</p>

Revisions		
Rev	Description	Date

DRAWING TYPE		ENIECCBPMU45240632AVGR	
 <small>(NO PERMISSION, NO CHANGING)</small>		Housing	Aluminium
unit=mm			Grey Oxidation TX 401 1.5g/L
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE			
SCALE 1:3		DATE 05-03-2016	