


1 2 3 4 5 6 7 8


A

A

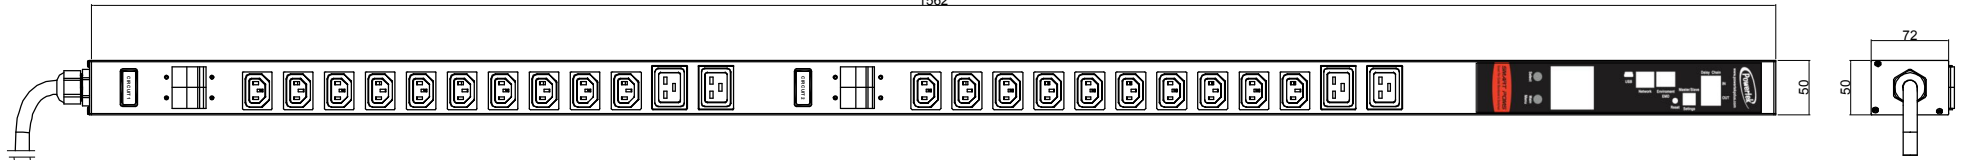


B

B




C

C

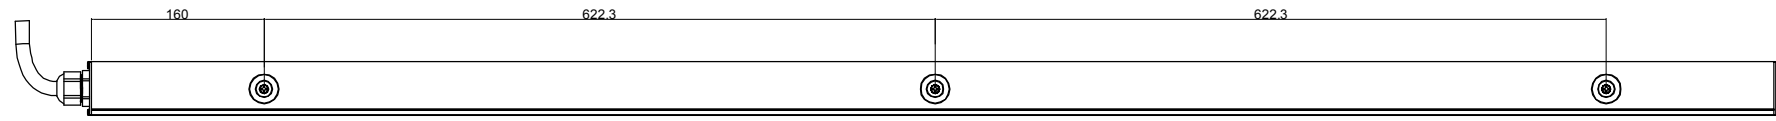

D

D

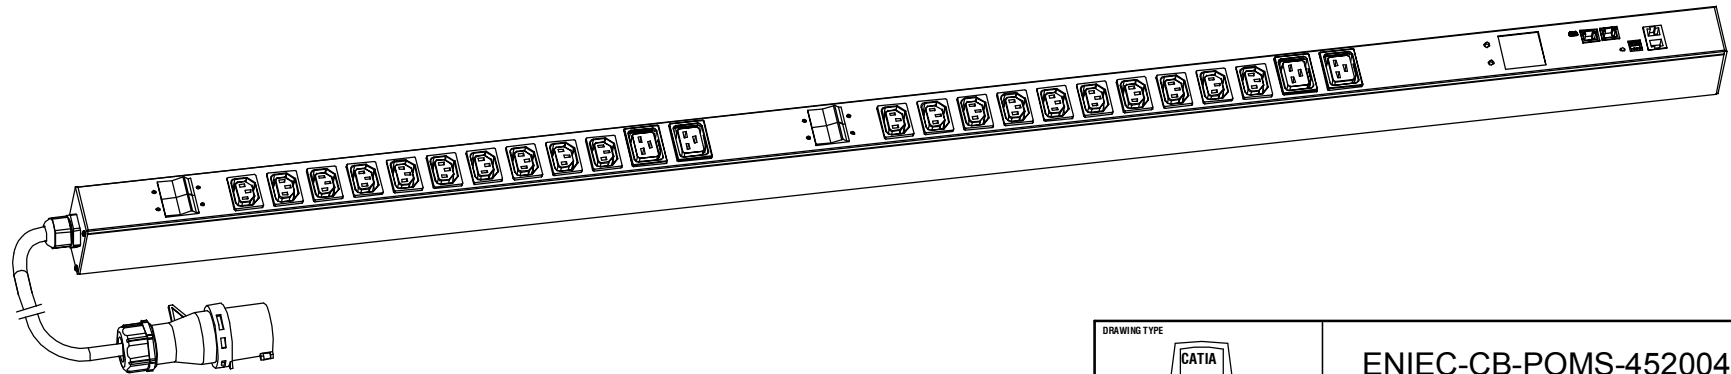



E

E

F

F

- Outlets 20x IECC13 + 4xC19
- Indicator POMS (PMU+SNMP+Outlet Boards)
- Protector 4x16A Airpax Breaker
- Power Plug 32AMP COMMANDO Plug
- Power Cable H07RN-F 3G4.0mm<sup>2</sup>, 3M
- Current Rating 32A
- Voltage Rating 250VAC

DRAWING TYPE		ENIEC-CB-POMS-452004-32A-V	
 (NO PERMISSION, NO CHANGING)		MATERIAL:	
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE			
SCALE 1:3		DATE 2014-04-12	

1 2 3 4 5 6 7 8