

1 2 3 4 5 6 7 8

A

B

C

D

E

F

A

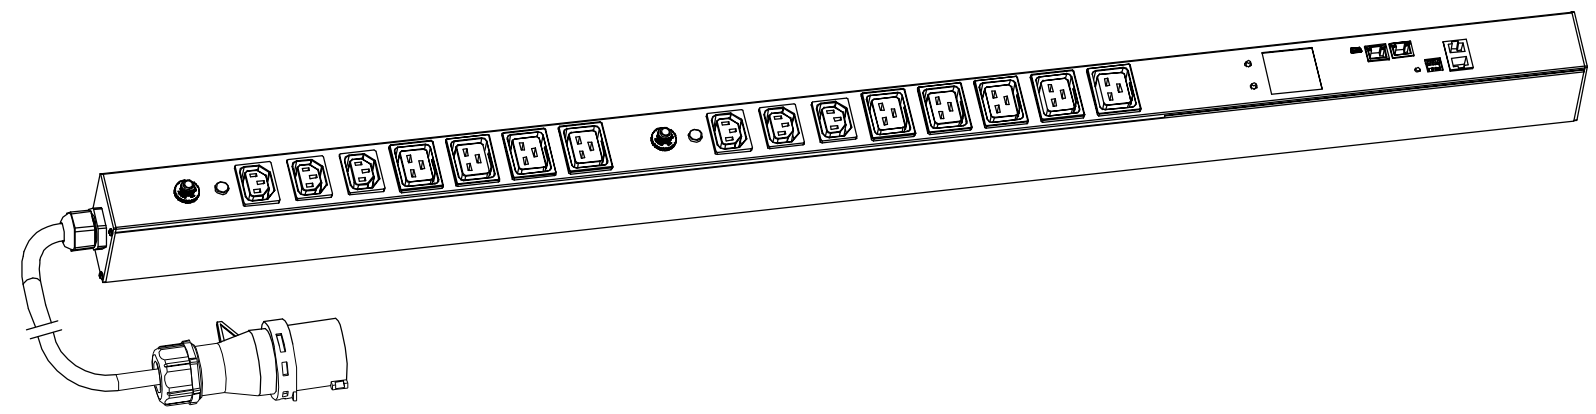
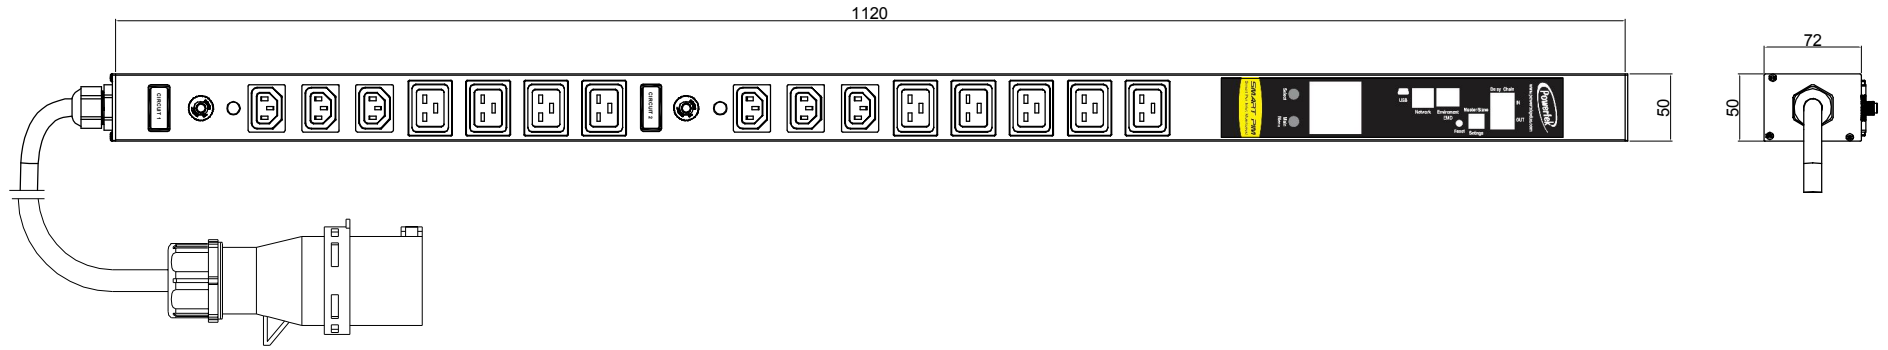
B

C




D

E

F



Outlets 6x IECC13 + 9xC19
 Indicator PIM (PMU+SNMP) + 2xLED
 Protector 2x16A Overload
 Power Plug 32AMP COMMANDO Plug
 Power Cable H07RN-F 3G4.0mm², 3M
 Current Rating 32A
 Voltage Rating 250VAC

DRAWING TYPE		ENIECOLPIM45060932AV	
 (NO PERMISSION, NO CHANGING)		MATERIAL:	
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE			
SCALE 1:3		DATE 2014-04-09	

1 2 3 4 5 6 7 8