
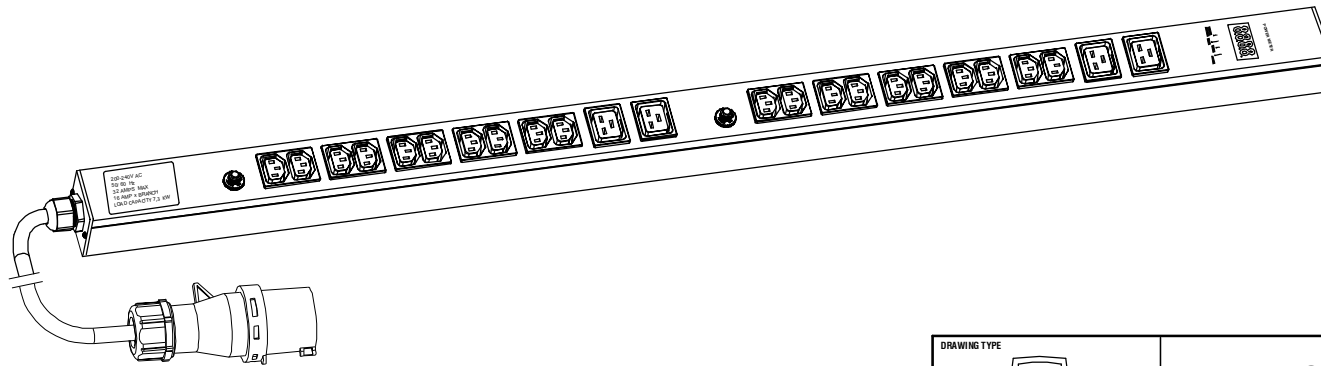




Copyright 2016 -

RoHS Compliant

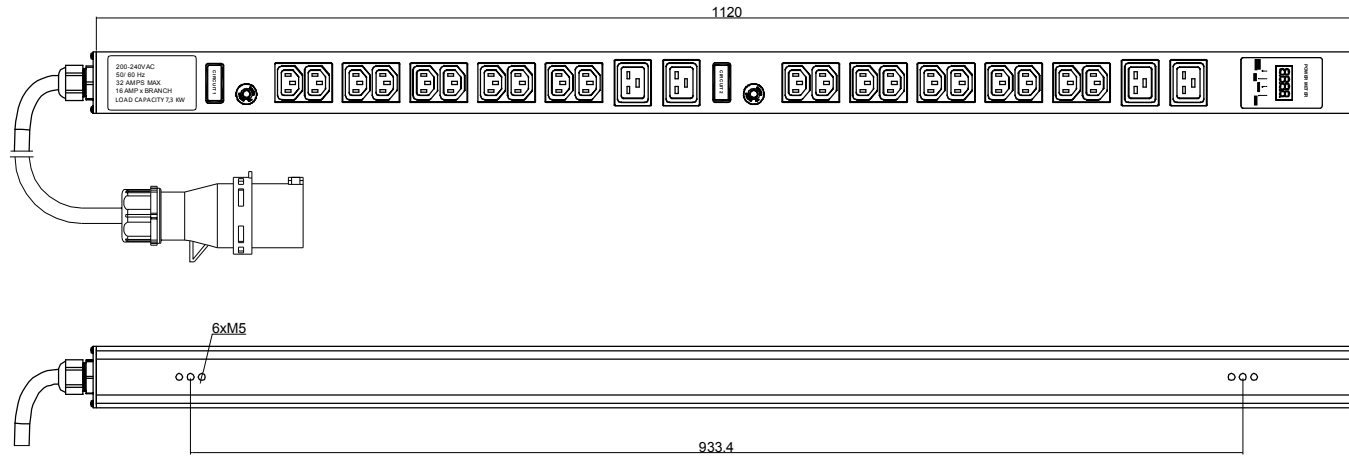

<p>PM Series</p> <p>Power Meter Red Chasis</p>	<p>OUTPUT</p> <p>(20) IECC13 Socket (10A Rated) (4) IECC19 Socket (16A Rated)</p>	<p>OPERATING TEMPERATURE</p> <p>0° to 60°C</p>
<p>INPUT</p> <p>250VAC 32A 50HZ IEC60309 32A Commando plug 3M H07RN-F3G4.0mm² Power lead</p>	<p>BRANCH CIRCUITS</p> <p>(2) 16A Overload</p>	<p>MOUNTING ACCESORIES</p> <p>(2) button mounting</p>

Revisions		
Rev	Description	Date

DRAWING TYPE		ENIECOPM46200432AVR	
 <small>(NO PERMISSION, NO CHANGING)</small>		Housing Aluminium Red OxidationTX 304 0.5g/L	
unit=mm TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			
FILLET	R0.5	SCALE 1:3 DATE 17-02-2016	
ANGLE	±0.5°		
FIRST ANGLE 